

Akademija tehničko-umetničkih strukovnih
studija Beograd
Odsek Visoka ICT škola

Goggles shop

<http://goggles.alemadic.com/>

Aleksandar Madić 2/18

Smer: Internet tehnologije

Module: Web programiranje

Predmet: Web programiranje PHP 2

Sadržaj

| | |
|--|----|
| 1. Uvod..... | 5 |
| 1.1 Korišćeni programski jezici..... | 5 |
| 1.2 Opis funkcionalnosti..... | 5 |
| 1.3 Template..... | 7 |
| 2. Organizacija..... | 19 |
| 2.1 Šema baze podataka..... | 19 |
| 2.2 Mapa sajta..... | 20 |
| 2.3 Struktura projekta..... | 22 |
| 3. Kod..... | 26 |
| 3.1 PHP..... | 26 |
| 3.1.1 routes/web.php..... | 26 |
| 3.1.2 BackController..... | 28 |
| 3.1.3 BrandController..... | 29 |
| 3.1.4 CartController..... | 33 |
| 3.1.5 ContactController..... | 37 |
| 3.1.6 FrontController..... | 38 |
| 3.1.7 LoginController..... | 41 |
| 3.1.8 LogoutController..... | 42 |
| 3.1.9 MyBaseController..... | 44 |
| 3.1.10 OrderController..... | 44 |
| 3.1.11 PasswordRecoveryController..... | 46 |
| 3.1.12 ProductController..... | 48 |
| 3.1.13 RegisterController..... | 54 |
| 3.1.14 UserActionController..... | 56 |
| 3.1.15 CheckAdmin Middleware..... | 57 |
| 3.1.16 CheckLogin Middleware..... | 57 |
| 3.1.17 ContactRequest..... | 58 |
| 3.1.18 CreatePasswordRequest..... | 59 |
| 3.1.19 LoginRequest..... | 60 |
| 3.1.20 RegisterUserRequest..... | 61 |
| 3.1.21 StoreBrandRequest..... | 62 |
| 3.1.22 StoreOrderRequest..... | 63 |
| 3.1.23 StoreProductRequest..... | 64 |
| 3.1.24 UpdateBrandRequest..... | 65 |
| 3.1.25 UpdateProductRequest..... | 66 |
| 3.1.26 Brand..... | 67 |
| 3.1.27 Cart..... | 67 |
| 3.1.28 Category..... | 68 |
| 3.1.29 FilterProduct..... | 69 |

| | |
|--|-----|
| 3.1.30 Image..... | 72 |
| 3.1.31 ImageUpload..... | 72 |
| 3.1.32 Menu..... | 73 |
| 3.1.33 Order..... | 74 |
| 3.1.34 OrderInfo..... | 74 |
| 3.1.35 PasswordReset..... | 75 |
| 3.1.36 Price..... | 76 |
| 3.1.37 Product..... | 77 |
| 3.1.38 Role..... | 78 |
| 3.1.39 SliderImage..... | 78 |
| 3.1.40 User..... | 79 |
| 3.1.41 UserAction..... | 80 |
| 3.1.42 Utility..... | 81 |
| 3.2 Blade..... | 82 |
| 3.2.1 client.layout..... | 82 |
| 3.2.2 client.fixed.head..... | 83 |
| 3.2.3 client.fixed.header..... | 84 |
| 3.2.4 client.fixed.footer..... | 88 |
| 3.2.5 client.fixed.commonScripts..... | 90 |
| 3.2.6 client.components.banner..... | 92 |
| 3.2.7 client.components.product..... | 93 |
| 3.2.8 client.components.featuredProduct..... | 95 |
| 3.2.9 client.pages.about..... | 97 |
| 3.2.10 client.pages.author..... | 102 |
| 3.2.11 client.pages.cart..... | 104 |
| 3.2.12 client.pages.contact..... | 111 |
| 3.2.13 client.pages.home..... | 115 |
| 3.2.14 client.pages.login..... | 122 |
| 3.2.15 client.pages.passwordNew..... | 124 |
| 3.2.17 client.pages.passwordReset..... | 127 |
| 3.2.18 client.pages.products..... | 129 |
| 3.2.19 client.pages.register..... | 135 |
| 3.2.20 client.pages.single..... | 138 |
| 3.2.21 admin.layout..... | 144 |
| 3.2.22 admin.actions.index..... | 145 |
| 3.2.23 admin.brands.create..... | 148 |
| 3.2.24 admin.brands.edit..... | 149 |
| 3.2.25 admin.brands.edit..... | 150 |
| 3.2.26 admin.brands.form..... | 152 |
| 3.2.27 admin.brands.index..... | 153 |
| 3.2.28 admin.fixed.head..... | 156 |
| 3.2.29 admin.fixed.sidebar..... | 156 |
| 3.2.30 admin.fixed.footer..... | 158 |

| | | |
|--------|----------------------------|-----|
| 3.2.31 | admin.fixed.scripts..... | 158 |
| 3.2.32 | admin.orders.index..... | 159 |
| 3.2.33 | admin.pages.home..... | 161 |
| 3.2.34 | admin.products.create..... | 165 |
| 3.2.35 | admin.products.edit..... | 166 |
| 3.2.36 | admin.products.form..... | 167 |
| 3.2.37 | admin.products.index..... | 173 |
| 3.3 | JS..... | 179 |
| 3.3.1 | script.js..... | 179 |
| 3.3.2 | orders.js..... | 187 |
| 3.3.3 | contact.js..... | 189 |
| 3.3.4 | password.js..... | 191 |
| 3.3.5 | admin/actions.js..... | 193 |
| 3.3.7 | admin/brands.js..... | 194 |
| 3.3.8 | admin/products..... | 194 |
| 3.3.9 | sb-admin-2.min.js..... | 198 |

1. Uvod

1.1 Korišćeni programski jezici

Za izradu sajta korišćene su sledeće tehnologije:

- Laravel, MySQL
- HTML 5, CSS 3, Bootstrap
- JavaScript, jQuery, AJAX
- Visual studio Code


1.2 Opis funkcionalnosti

- Registracija i logovanje uz validaciju podataka na serveru
- Dinamičko ispisivanje menija, slider slika, proizvoda iz baze
- Sortiranje, filtriranje i paginacija (korelisani) proizvoda upotrebom ajaxa
- Dodavanje proizvoda u korpu upotrebom ajaxa (provera da li je korisnik ulogovan upotrebom middleware-a)
- Posebna stranica sa podacima o proizvodima iz korpe, gde korisnik može da menja količinu ili da obriše iz korpe upotrebom ajaxa
- Kada odluči šta želi da kupi, korisnik treba da unese podatke za kako bi kompletirao porudžbinu (adresa, broj kartice..). Kreiranje porudžbine ajaxom.
- Forma za kontakt koju korisnici mogu koristiti kako bi kontaktirali admina

- Korisniku je omogućeno da promenu lozinku u slučaju da je zaboravio
- Admin panel (zaštićen middleware-om) gde admin može da izši CRUD operacije sa proizvodima i brendovima. Takođe može da pogleda ključne akcije koji su korisnici izšili, listanje svih porudžbina

1.3 Template

Index strana

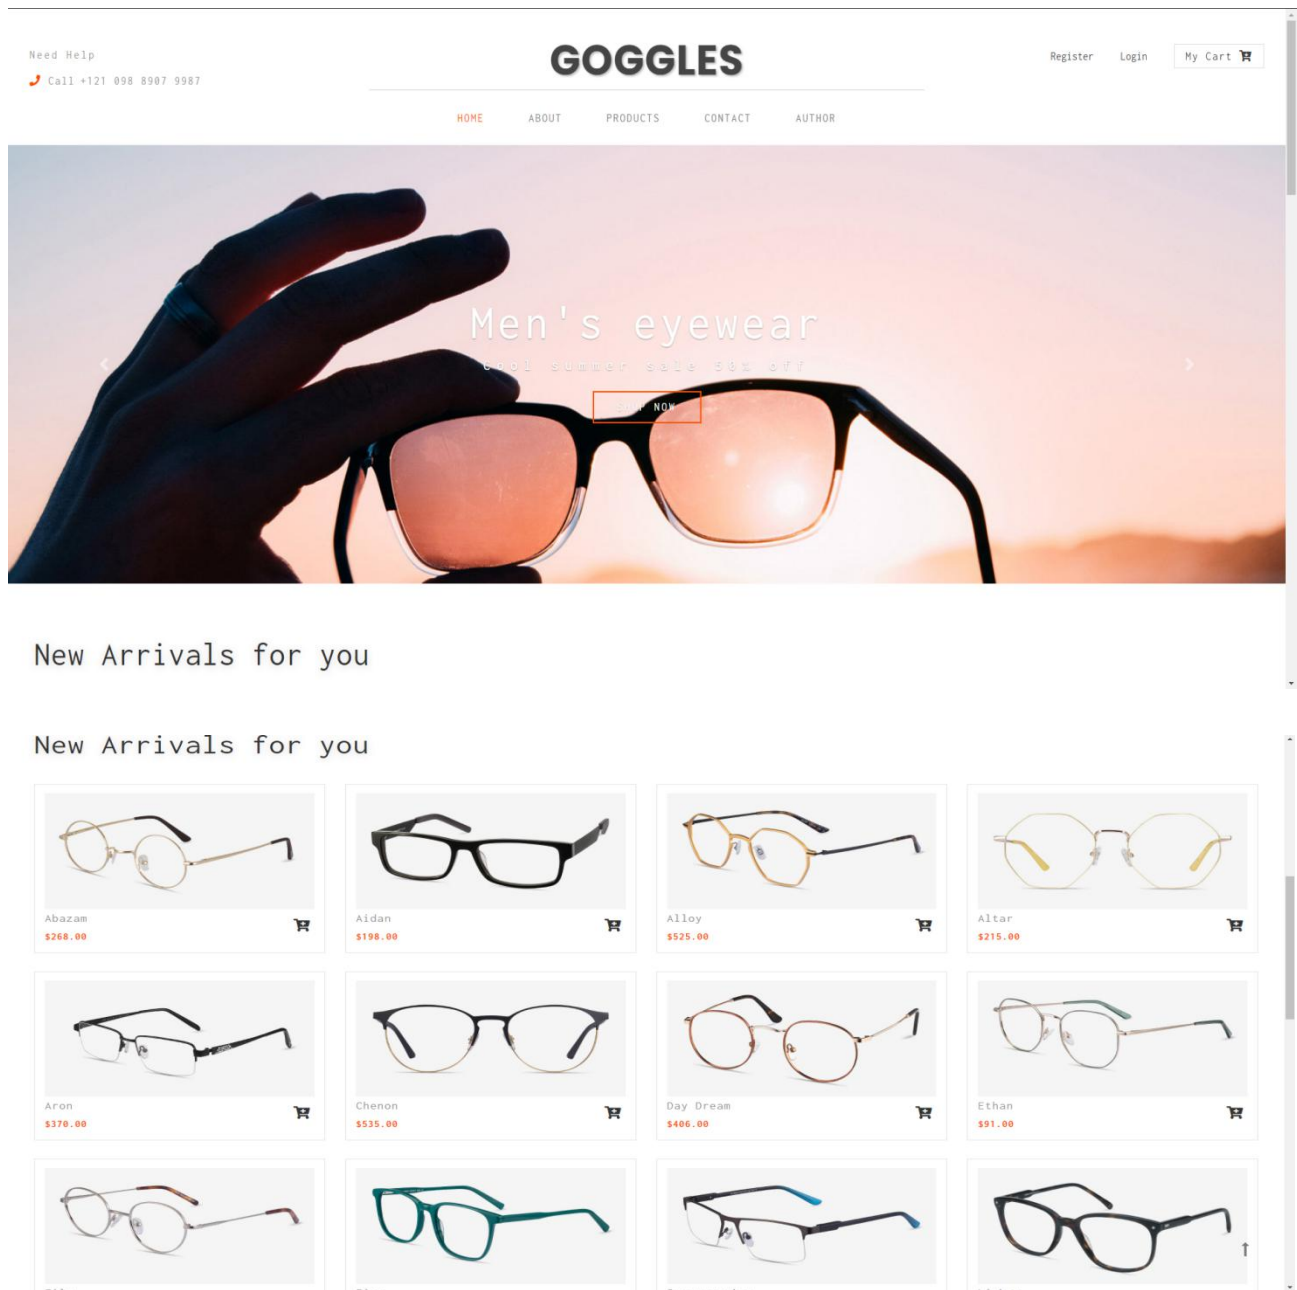



Tesimonials

Michelle Ross Customer
United States

Well... I'd just like to say that Goggles Opticians in our little town are amazing. I didn't realise how much I was struggling with my eyesight and shonky gems until my visit to them this afternoon. Awesome staff - thank you



Satisfaction Guaranteed

With our Total Satisfaction Guarantee, you can be certain you have a quality product at a great price, while enjoying the benefits of a free lifetime service for your glasses.

SHOP NOW



Fast Shipping

Once you've selected your frames, get ready to wear your perfect pair of glasses, because they are 2-4 days ahead your home.

SHOP NOW



UV Protection

The effect of UV light on our eyes and the danger of damage from UV radiation grows the more time we spend in the sun throughout our lives.

SHOP NOW

About Us

The Goggles Shop is dedicated to providing you with the highest standards of professional eye care, together with a friendly service, quality products and excellent value.




Get in touch

Location :
8926k 4th block building, King Avenue, San Francisco
Contact :
Phone : +121 898 8907 9987
Email : info@goggles.com

Quick Links

Home
About
Shop
Contact Us

About strana

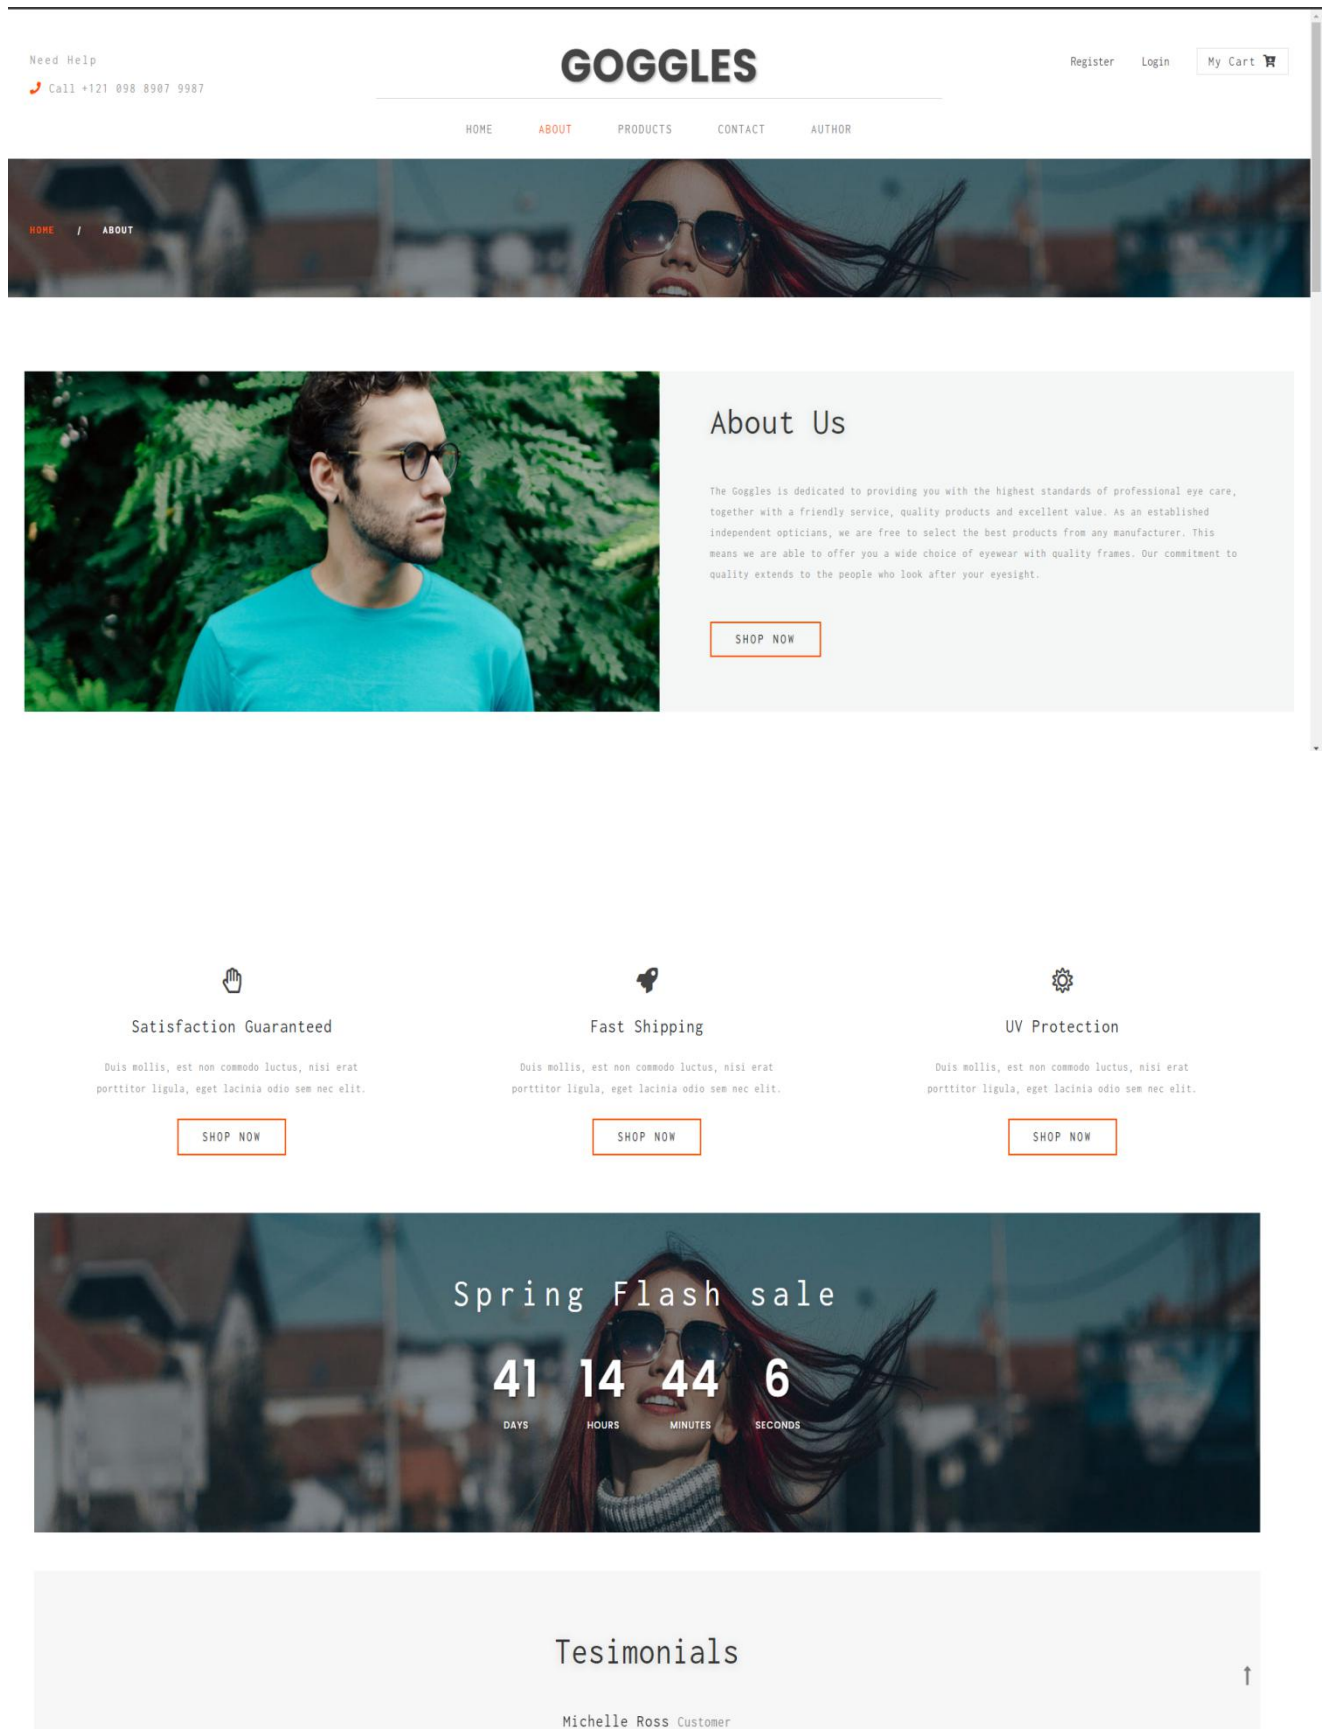

Products strana

New Arrivals for you

Search Here..

Choose sort:

Name: A-Z

Gender

☐ All

☐ Male

☐ Female

Categories

☐ Eyeglasses

☐ Sunglasses

Brands

☐ Ray-Ban


☐ Oakley

☐ Mario Rossi

☐ Gucci


☐ Mont Blanc

Apply




Abazam

\$268.00




Aidan

\$198.00




Alloy

\$525.00




Altar

\$215.00




Chenon

\$535.00




Day Dream

\$406.00




Ethan

\$91.00




Film

\$75.00




Finn

\$118.00




Interception

\$336.00



Lisbon

\$403.00



Metaphor

\$575.00

1 2 3 4

Search Here..

Choose sort:

Price: Low to High

Gender

☐ All

☒ Male

☐ Female

Categories

☐ Eyeglasses

☐ Sunglasses

Brands

☐ Ray-Ban


☐ Oakley

☐ Mario Rossi

☐ Gucci


☐ Mont Blanc

Apply




Abazam

\$268.00




Interception

\$336.00




Lisbon

\$403.00




Day Dream

\$406.00




Pacific

\$453.00




Prism

\$463.00




Yard

\$508.00




Alloy

\$525.00



Chenon

\$535.00




Metaphor

\$575.00

1 2

☐ Oakley
☐ Mario Rossi
☐ Gucci
☐ Mont Blanc


Apply



Chenon

\$535.00

★★★★★




Metaphor

\$575.00

★★★★★


1 2

Featured Products




Metaphor

\$198.00




Metaphor

\$525.00



Metaphor

\$535.00



Metaphor


\$91.00

[About Us](#)

[Get in touch](#)

[Quick Links](#)

Single Product strana






Lauren / O. Carrera / Sunglasses

\$521.00


Add some vintage flair to your style with these tortoise sunglasses. This oval shaped frame features a glossy semi-transparent tortoiseshell frame front reminiscent of old Hollywood glamour. Gold metal temples add a modern twist to a classic that channels Audrey and Jackie O, while acetate arm tips means you won't.

ADD TO CART

Share On : [f](#) [t](#) [in](#) [v](#)






Featured Products




Lauren

\$198.00




Lauren

\$525.00



Lauren

\$535.00






Lauren

\$91.00


Contact strana

Contact

WE LOVE TO DISCUSS YOUR IDEA




| | | |
|---|--|---|
|  Address California, USA |  Email Email : info@goggles.com |  Phone +1 234 567 8901 |
|---|--|---|
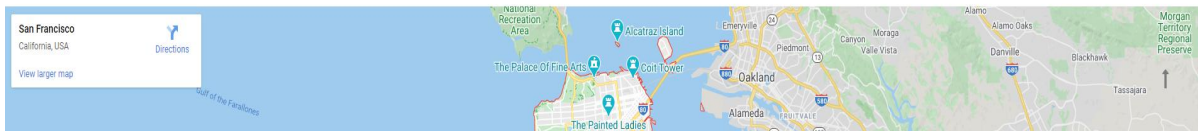
| | |
|---------------------------------|---------------------------------------|
| NAME <input type="text"/> | MESSAGE <input type="text"/> |
| EMAIL <input type="text"/> | |
| SUBJECT <input type="text"/> | <input type="button" value="SUBMIT"/> |



Contact

WE LOVE TO DISCUSS YOUR IDEA

| | | |
|---|--|---|
|  Address California, USA |  Email Email : info@goggles.com |  Phone +1 234 567 8901 |
|---|--|---|

| | |
|---|---|
| NAME <input type="text" value="Marko Marko"/> | MESSAGE <input type="text" value="HOJSHDAKJ HSKDHASJ DHAKJD"/> |
| EMAIL <input type="text" value="addd"/> <small>The email must be a valid email address.</small> | |
| SUBJECT <input type="text" value="Test email"/> | <input type="button" value="SUBMIT"/> |




Register strana



Register your account

| | |
|-----------------------------------|---------------------------------|
| FIRST NAME | PASSWORD |
| <input type="text"/> | <input type="password"/> |
| The first name field is required. | The password field is required. |
| LAST NAME | RE-TYPE PASSWORD |
| <input type="text"/> | <input type="password"/> |
| The last name field is required. | |
| EMAIL | |
| <input type="text"/> | |
| The email field is required. | |

SUBMIT

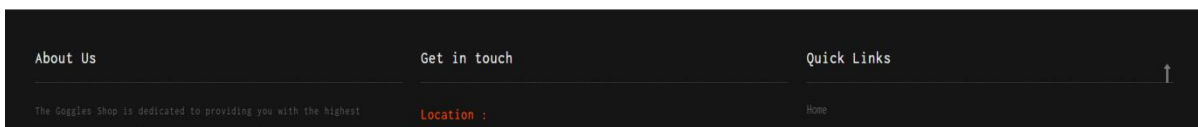

Login strana



Log in

| |
|---------------------------------------|
| EMAIL |
| <input type="text"/> |
| PASSWORD |
| <input type="password"/> |
| Forgot your password? |

SUBMIT



Password Recovery strana


Need Help
Call +121 098 8907 9987

GOGGLES

HOMEABOUTPRODUCTSCONTACTAUTHOR

RegisterLoginMy Cart

HOME / PASSWORD RECOVERY



Password Recovery

AN E-MAIL WILL BE SEND TO YOU WITH INSTRUCTIONS ON HOW TO RESET PASSWORD

SUBMIT

About Us

Get in touch

Quick Links

← → 127.0.0.1:8000/password/new?validator=\$2y\$10\$yEpAXp6Xu8ro9RMFDH9cej9qvo3D47KZGeweD8d6Zghr4VE6


Need Help
Call +121 098 8907 9987

GOGGLES

HOMEABOUTPRODUCTSCONTACTAUTHOR

RegisterLoginMy Cart

HOME / PASSWORD RESET

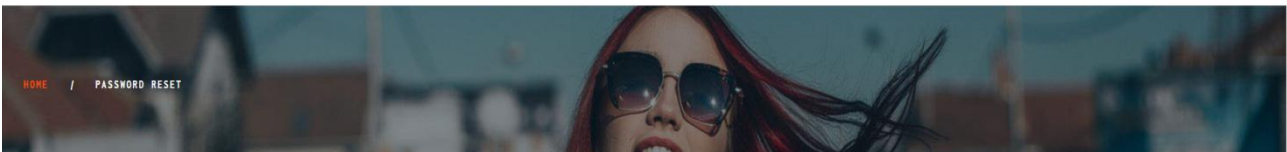

Password Reset

ENTER NEW PASSWORD

RE-TYPE NEW PASSWORD

SUBMIT

Password Reset

You have been successfully changed your password

ENTER NEW PASSWORD

RE-TYPE NEW PASSWORD

SUBMIT

About Us

The Goggles Shop is dedicated to providing you with the highest standards of professional service, together with the friendly service

Get in touch

Location :

Quick Links

[Home](#)



Admin panel

GOGGLES

Dashboard

Products

Brands

Orders

User actions

<

Logout

Welcome back, Adm Admin

EARNINGS (TOTAL)
\$661

NUMBER OF ORDERS
2

NUMBER OF PRODUCTS
49

Copyright © Your Website 2020

GOGGLES

Dashboard

Products

Brands

Orders













User actions

<

Products

Add new Product

Keyword Number of entities Choose sort:

| # | Name | Image | Price | Brand | Gender | Edit | Delete |
|---|--------|---|----------|-------------|--------|---|---|
| 1 | Abazam |  | \$268.00 | Ray-Ban | Male |  |  |
| 2 | Aidan |  | \$198.00 | Mont Blanc | Male |  |  |
| 3 | Alloy |  | \$525.00 | Oakley | Male |  |  |
| 4 | Altar |  | \$215.00 | Mario Rossi | Male |  |  |

GOGGLES

Dashboard

Products

Brands

Orders

User actions

<

Brands

Add new Brand

| # | Name | Active | Edit | Delete |
|---|-------------|--------|---|---|
| 1 | Ray-Ban | Yes |  |  |
| 2 | Oakley | Yes |  |  |
| 3 | Mario Rossi | Yes |  |  |
| 4 | Gucci | Yes |  |  |
| 5 | Mont Blanc | Yes |  |  |
| 6 | O. Carrera | No |  |  |
| # | Name | Active | Edit | Delete |

GOGGLES

Dashboard

Products

Brands

Orders

User actions

<

Orders

| # | User name | Address | Paid | Total price |
|---|------------|--------------------|------|-------------|
| 1 | Mike Amiri | Carlíja Caplina 12 | True | \$386 |
| 2 | Mike Amiri | Kneza Milosa 324 | True | \$275 |
| # | User name | Address | Paid | Total price |



Users actions

Select date

03/13/2021


Select All ☐

Submit

| # | Action | User | Date |
|----|---------|-----------|-----------------------------|
| 1 | Login | Adm Admin | 2021-03-13T07:13:10.000000Z |
| 2 | Log out | Adm Admin | 2021-03-13T08:01:24.000000Z |
| 3 | Login | Ale Madic | 2021-03-13T10:18:04.000000Z |
| 4 | Log out | Ale Madic | 2021-03-13T10:18:14.000000Z |
| 5 | Login | Ale Madic | 2021-03-13T10:19:03.000000Z |
| 6 | Log out | Ale Madic | 2021-03-13T11:40:15.000000Z |
| 7 | Login | Ale Madic | 2021-03-13T12:59:41.000000Z |
| 8 | Log out | Ale Madic | 2021-03-13T13:25:00.000000Z |
| 9 | Login | Adm Admin | 2021-03-13T15:26:39.000000Z |
| 10 | Log out | Adm Admin | 2021-03-13T15:34:26.000000Z |
| 11 | Login | Adm Admin | 2021-03-13T20:14:43.000000Z |
| 12 | Log out | Adm Admin | 2021-03-13T20:24:39.000000Z |
| 13 | Login | Ale Madic | 2021-03-13T20:25:15.000000Z |
| 14 | Log out | Ale Madic | 2021-03-13T20:26:09.000000Z |

2. Organizacija

2.1 Šema baze podataka

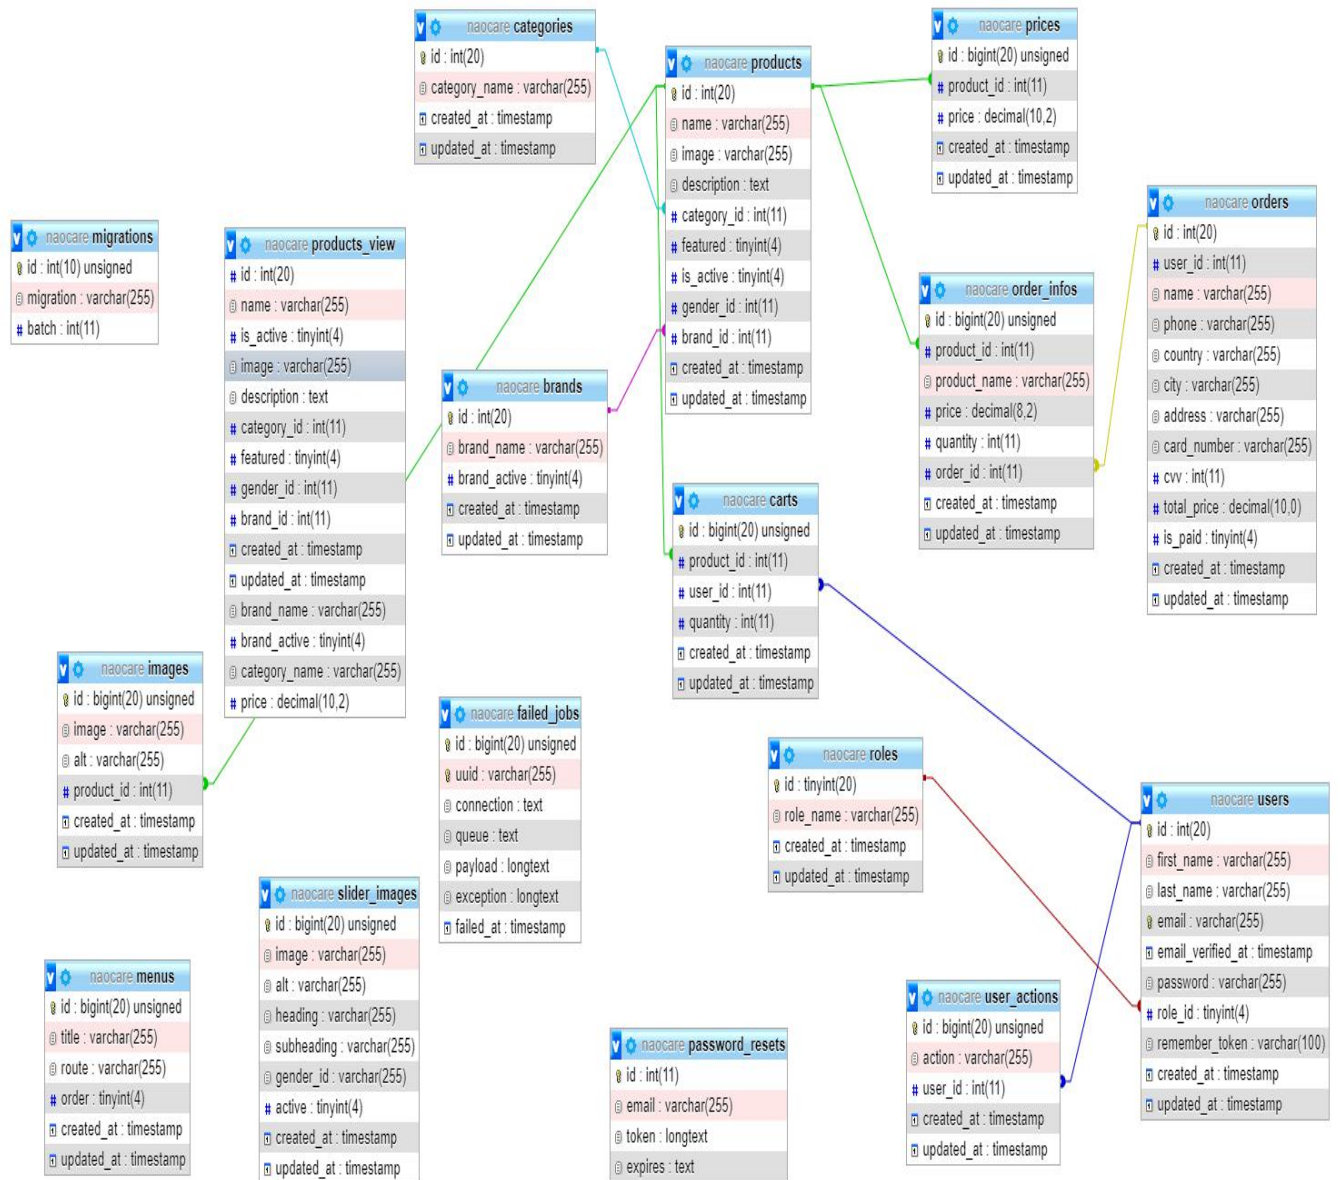

2.2 Mapa sajta

```
<urlset xmlns="http://www.sitemaps.org/schemas/sitemap/0.9">
  <url>
    <loc>http://goggles.alemadic.com/</loc>
    <lastmod>2020-03-12</lastmod>
    <changefreq>weekly</changefreq>
    <priority>0.95</priority>
  </url>

  <url>
    <loc>http://goggles.alemadic.com/products</loc>
    <lastmod>2020-03-12</lastmod>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
  </url>
```

```
  <url>
    <loc>http://goggles.alemadic.com/about</loc>
    <lastmod>2020-03-12</lastmod>
    <changefreq>monthly</changefreq>
    <priority>0.7</priority>
  </url>
```

```
  <url>
    <loc>http://goggles.alemadic.com/back</loc>
    <lastmod>2020-03-06</lastmod>
    <changefreq>weekly</changefreq>
    <priority>0.7</priority>
  </url>
```

```
  <url>
    <loc>http://goggles.alemadic.com/login</loc>
    <lastmod>2020-03-12</lastmod>
    <changefreq>monthly</changefreq>
    <priority>0.65</priority>
  </url>
```

```
  <url>
    <loc>http://goggles.alemadic.com/register</loc>
    <lastmod>2020-03-12</lastmod>
    <changefreq>monthly</changefreq>
    <priority>0.65</priority>
  </url>
```


```
  <url>
```

```
<loc>http://goggles.alemadic.com/contact</loc>  
<lastmod>2020-03-12</lastmod>  
<changefreq>yearly</changefreq>  
<priority>0.55</priority>  
</url>
```

```
<url>  
  <loc>http://goggles.alemadic.com/logout</loc>  
  <lastmod>2020-03-12</lastmod>  
  <changefreq>yearly</changefreq>  
  <priority>0.55</priority>  
</url>
```

```
</urlset>
```

2.3 Struktura projekta

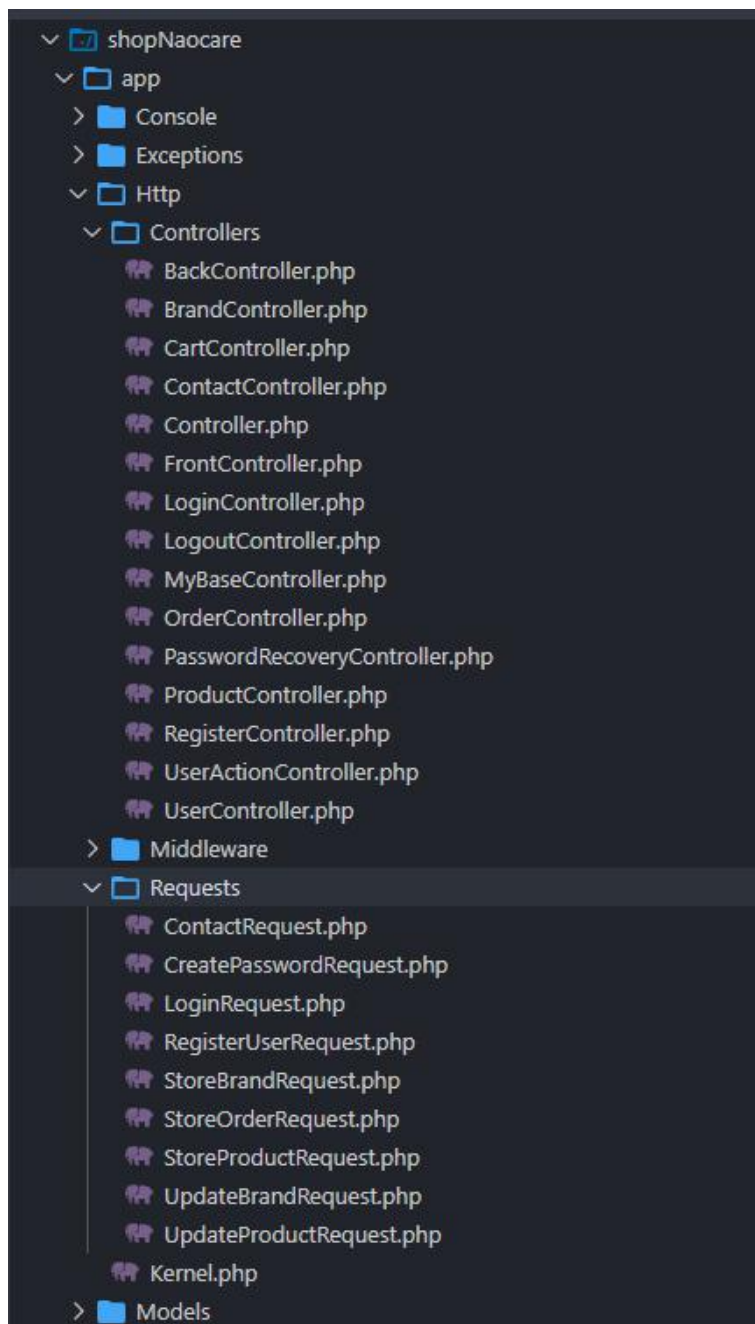

> Controllers

▼ Middleware

- Authenticate.php
- CheckAdmin.php
- CheckLogin.php
- EncryptCookies.php
- PreventRequestsDuringMaintenance.php
- RedirectIfAuthenticated.php
- TrimStrings.php
- TrustHosts.php
- TrustProxies.php
- VerifyCsrfToken.php

> Requests
































- Kernel.php

▼ Models

- Brand.php
- Cart.php
- Category.php
- FilterProduct.php
- Image.php
- ImageUpload.php
- Menu.php
- Order.php
- OrderInfo.php
- PasswordReset.php
- Price.php
- Product.php
- Review.php
- Role.php
- SliderImage.php
- User.php
- UserAction.php
- Utility.php

> Providers

- resources
 - css
 - js
 - lang
- views
 - admin
 - actions
 - index.blade.php
 - brands
 - create.blade.php
 - edit.blade.php
 - form.blade.php
 - index.blade.php
 - fixed
 - footer.blade.php
 - head.blade.php
 - scripts.blade.php
 - sidebar.blade.php
 - orders
 - index.blade.php
 - pages
 - home.blade.php
 - products
 - create.blade.php
 - edit.blade.php
 - form.blade.php
 - index.blade.php
 - layout.blade.php
 - client
 - vendor
 - welcome.blade.php

- ▼  resources
 - >  css
 - >  js
 - >  lang
- ▼  views
 - >  admin
 - ▼  client
 - ▼  components
 -  banner.blade.php
 -  featuredProduct.blade.php
 -  product.blade.php
 - ▼  fixed
 -  commonScripts.blade.php
 -  footer.blade.php
 -  head.blade.php
 -  header.blade.php
- ▼  pages
 -  about.blade.php
 -  author.blade.php
 -  cart.blade.php
 -  contact.blade.php
 -  home.blade.php
 -  login.blade.php
 -  passwordNew.blade.php
 -  passwordReset.blade.php
 -  products.blade.php
 -  register.blade.php
 -  single.blade.php
 -  layout.blade.php
- >  vendor
 -  welcome.blade.php

3. Kod

3.1 PHP

3.1.1 routes/web.php

```
<?php
```

```
use Illuminate\Support\Facades\Route;
use App\Http\Controllers\BackController;
use App\Http\Controllers\CartController;
use App\Http\Controllers\UserController;
use App\Http\Controllers\BrandController;
use App\Http\Controllers\FrontController;
use App\Http\Controllers>LoginController;
use App\Http\Controllers\OrderController;
use App\Http\Controllers\LogoutController;
use App\Http\Controllers>ContactController;
use App\Http\Controllers>PasswordRecoveryController;
use App\Http\Controllers\ProductController;
use App\Http\Controllers\RegisterController;
use App\Http\Controllers\UserActionController;
use App\Http\Middleware\CheckAdmin;
use App\Http\Middleware\CheckLogin;
```

```
/*
|-----
| Web Routes
|-----
|
| Here is where you can register web routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
|
*/
```

```
Route::get('/back', [BackController::class, 'home'])->name('admin.home')->
    middleware(CheckAdmin::class);
```

```
Route::get('/', [FrontController::class, 'home'])->name('home');
Route::get('/about', [FrontController::class, 'about'])->name('about');
```

```
Route::get('/products/fetch', [FrontController::class, 'productsFetch']);
```

```
Route::get('/products', [FrontController::class, 'products'])->name('home.products');
Route::get('products/{product}', [FrontController::class, 'product'])->name('home.products.show');
```

```
Route::get('/register', [RegisterController::class, 'index'])->name('register');
Route::post('/register', [RegisterController::class, 'store']);
```

```
Route::get('/login', [LoginController::class, 'index'])->name('login');
Route::post('/login', [LoginController::class, 'store']);
```

```
Route::get('/contact', [ContactController::class, 'index'])->name('contact');
Route::post('/contact', [ContactController::class, 'store']);
```

```
Route::get('/password/reset', [PasswordRecoveryController::class, 'create'])->name('password.get');
Route::post('/password/reset', [PasswordRecoveryController::class, 'reset'])->name('password.post');
Route::get('/password/new', [PasswordRecoveryController::class, 'edit'])->name('password.edit');
Route::post('/password/new', [PasswordRecoveryController::class, 'update'])->name('password.update');
```

```
Route::get('/author', [FrontController::class, 'author'])->name('author');
```

```
Route::middleware([CheckLogin::class])>group(function () {
    Route::get('/logout', [LogoutController::class, 'logout'])->name('logout');
});
```

```
// cart
Route::post('/cart', [CartController::class, 'store']);
Route::get('/cart', [CartController::class, 'cart'])->name('cart');
Route::put('/cart', [CartController::class, 'changeQuantity']);
Route::delete('/cart', [CartController::class, 'destroy']);
```

```
//orders
Route::post('/order', [OrderController::class, 'store']);
```

```
});
```

```
Route::group(['prefix' => 'admin', 'middleware' => 'checkAdmin'], function() {
    Route::get('/products/fetch', [ProductController::class, 'fetchProducts']);
});
```

```
Route::resource('/products', ProductController::class);
```

```
Route::resource('/brands', BrandController::class);
```

```
Route::get('/actions', [UserActionController::class, 'index'])->name('useractions.index');
Route::get('/actions/filter', [UserActionController::class, 'filter']);
```

```
Route::get('/orders', [OrderController::class, 'index'])->name('orders.index');
});
Route::get('/docs', function() {
    return response()->file(public_path() . '/docs.pdf');
});
```

3.1.2 BackController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\Order;
use App\Models\Product;
use Illuminate\Http\Request;
```

```
class BackController extends MyBaseController
{
    public function home()
    {
        $this->data['total_sum'] = Order::sum('total_price');
        $this->data['orders_num'] = Order::count('id');
        $this->data['products_num'] = Product::count('id');
```

```
        return view('admin.pages.home', $this->data);
    }
}
```

```
}
```

3.1.3 BrandController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Http\Requests\StoreBrandRequest;
use App\Http\Requests\UpdateBrandRequest;
use Exception;
use App\Models\Brand;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Log;
```

```
class BrandController extends Controller
{
    /**
     * Display a listing of the resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function index()
    {
        $this->data['brands'] = Brand::all();
```

```
        return view('admin.brands.index', $this->data);
    }
```

```
    /**
     * Show the form for creating a new resource.
     *
     * @return \Illuminate\Http\Response
     */
    public function create()
    {
        return view('admin.brands.create');
```

```
    /**
     * Store a newly created resource in storage.
     *
     * @param \Illuminate\Http\Request $request
     * @return \Illuminate\Http\Response
     */
    public function store(StoreBrandRequest $request)
    {
        DB::beginTransaction();
```

```
try
{
    Brand::create($request->all());
```

```
DB::commit();
```

```
        return redirect()->route('brands.create')-
>with('success', 'Brand added successfully!');
    }
    catch (Exception $e)
    {
        Log::error($e->getMessage());
```

```
// dd($e->getMessage());
```

```
DB::rollBack();
```

```
        return redirect()->route('brands.create')-
>with('errorMessage', 'A server error occurred!');
    }
}
```

```
/**
 * Display the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function show($id)
{
    //
}
```

```
/**
 * Show the form for editing the specified resource.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function edit($id)
{
    $this->data['brand'] = Brand::find($id);
```

```
    return view('admin.brands.edit', $this->data);
}
```

```

/**
 * Update the specified resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function update(UpdateBrandRequest $request, $id)
{
    $brand = Brand::find($id);

```

```

    DB::beginTransaction();

    try {
        $brand->update($request->all());

```

```

    DB::commit();

```

```

        return redirect()->route('brands.index')-
>with('success', 'Brand updated successfully!');
    }
    catch(Exception $e)
    {
        Log::error($e->getMessage());

```

```

    DB::rollBack();

    // dd($e->getMessage());
    return redirect()->route('products.edit', $brand->id)-
>with('errorMessage', 'A server error occurred!');

```

```

    }
}

```

```

/**
 * Remove the specified resource from storage.
 *
 * @param int $id
 * @return \Illuminate\Http\Response
 */
public function destroy($id)
{
    DB::beginTransaction();

```

```

    try {
        $brand = Brand::find($id);
        $brand->delete();

```

```
DB::commit();
```

```
        return redirect()->route('brands.index')-  
>with('success', 'Brand deleted successfully!');
```

```
    }  
    catch(Exception $e)  
    {  
        Log::error($e->getMessage());  
        // dd($e->getMessage());  
    }
```

```
DB::rollBack();
```

```
        return redirect()->route('brands.index')-  
>with('errorMessage', 'Brand can not be deleted, because it contains products!  
' );  
    }
```

```
    }  
}
```


3.1.4 CartController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\Cart;
use App\Models\Product;
use App\Models\UserAction;
use Illuminate\Http\Request;
use Illuminate\Http\Response;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Log;
```

```
class CartController extends MyBaseController
{
```

```
    public function cart(Request $request)
    {
        // if(!$request->session()->has('user')) {
        //     return redirect()->route('login')->with('fromCart', 'true');
        // }
    }
```

```
        $productIds = Cart::select('product_id', 'quantity')-
>where('user_id', $request->session()->get('user')->id)->get();
```

```
        // $products = DB::table('products')->whereIn('id', $productIds)-
>get();
```

```
        $products = [];
```

```
        foreach($productIds as $pid) {
            $singleProduct = Product::with('prices')->where('id', $pid-
>product_id)->first();
            $singleProduct->quantity = $pid->quantity;
```

```
            $products[] = $singleProduct;
        }
```

```
        $this->data['products'] = $products;
```

```
        return view('client.pages.cart', $this->data);
    }
```

```
    public function store(Request $request)
    {
```

```
// dd($request->productId);
```

```
$user = $request->session()->get('user');
```

```
DB::beginTransaction();
```

```
try {
```

```
    $cartObj = Cart::where('user_id', '=', $user->id)  
        ->where('product_id', $request->productId)-  
>first();
```

```
    if($cartObj) {  
        $product = Product::find($request->productId);
```

```
        $cartObj->quantity = $cartObj->quantity + 1;  
        $cartObj->save();
```

```
        DB::commit();
```

```
        return response(['message' => "Updated quantity for $product-  
>name glasses!"], Response::HTTP_OK);  
    }
```

```
    $cart = new Cart;  
    $cart->product_id = $request->productId;  
    $cart->user_id = $user->id;
```

```
    $result = $cart->save();
```

```
    UserAction::create(['action' => 'Added to cart', 'user_id' => $us  
er->id]);
```

```
    DB::commit();
```

```
    if($result) {  
        return response(['message' => 'Successfully added to the cart!  
>', Response::HTTP_CREATED);  
    } else {  
        return response(['message'=> 'Server Error'], Response::HTTP_  
INTERNAL_SERVER_ERROR);  
    }
```

```
    } catch (\Exception $e) {  
        Log::error($e->getMessage());
```

```
    DB::rollBack();
```

```

        return response(['message'=> 'Cart data is Invalid'], Response::HTTP_UNPROCESSABLE_ENTITY);
    }
}

```

```

public function destroy(Request $request)
{
    // if(!$request->session()->has('user')) {
    //     return response(['message'=> 'Login first!'], Response::HTTP_UNAUTHORIZED);
    // }
}

```

```

DB::beginTransaction();

```

```

try {
    $cart = Cart::where('product_id', $request->productId)->first();
}

```

```

$result = $cart->delete();

```

```

UserAction::create(['action' => 'Removed to cart', 'user_id' => $request->session()->get('user')->id]);

```

```

$itemsInCart = Cart::where('user_id', '=', $request->session()->get('user')->id)->get();

```

```

DB::commit();

```

```

if(count($itemsInCart) == 0) {
    return response(['message' => 'Removed last product from cart.'], Response::HTTP_BAD_REQUEST);
}

```

```

if($result) {
    return response(['message' => 'Successfully removed product from cart!', 'itemsInCart' => $itemsInCart], Response::HTTP_OK);
} else {
    return response(['message'=> 'Server Error'], Response::HTTP_INTERNAL_SERVER_ERROR);
}

}
catch (\Exception $e)
{
    Log::error($e->getMessage());
}

```

```
DB::rollBack();
```

```
        return response(['message'=> 'Cart data is Invalid'], Response::HTTP_UNPROCESSABLE_ENTITY);
    }

}
```

```
public function changeQuantity(Request $request)
{
    try {
        $cart = Cart::where('product_id', $request->productId)->first();
```

```
        $cart->quantity = $request->quantity;
```

```
        $result = $cart->save();
```

```
        $itemsInCart = Cart::where('user_id', '=', $request->session()->get('user')->id)->get();
```

```
        UserAction::create(['action' => 'Changed quantity', 'user_id' => $request->session()->get('user')->id]);
```

```
        if($result) {
            return response(['message' => 'Successfully changed quantity!', 'itemsInCart' => $itemsInCart], Response::HTTP_OK);
        } else {
            return response(['message'=> 'Server Error'], Response::HTTP_INTERNAL_SERVER_ERROR);
        }
    }
    catch(\Exception $e)
    {
        Log::error($e->getMessage());
    }
}
```

```
        return response(['message'=> 'Quantity is Invalid'], Response::HTTP_UNPROCESSABLE_ENTITY);
    }
}
```

```
}
```

3.1.5 ContactController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Http\Requests\ContactRequest;
```

```
use Illuminate\Http\Request;
```

```
use Illuminate\Http\Response;
```

```
class ContactController extends MyBaseController
{
    public function index()
    {
        return view('client.pages.contact', $this->data);
    }
}
```

```
public function store(ContactRequest $request)
{
    $name = $request->name;
    $subject = $request->subject;
    $email = $request->email;
    $message = $request->message;
```

```
    $toEmail = "goggles@alemadic.com";
    $body = "<h2>Contact Request</h2>
        <h4>Name</h4><p>{$name}</p>
        <h4>Email</h4><p>{$email}</p>
        <h4>Message</h4><p>{$message}</p>
    ";
```

```
    // Email Headers
    $headers = "MIME-Version: 1.0" . "\r\n";
    $headers .= "Content-Type:text/html;charset=UTF-8" . "\r\n";
```

```
    // Additional Headers
    $headers .= "From: " . $name . "<". $email . ">" . "\r\n";
```

```
    if(mail($toEmail, $subject, $body, $headers)){
        return response(['message' => 'Your email has been sent'], Response::HTTP_OK);
    } else {
```

```
        return response(['message' => 'Your email was not sent. Try again later'], Response::HTTP_INTERNAL_SERVER_ERROR);
    }
}
```

```
}
```

```
}
```

3.1.6 FrontController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\Brand;
use App\Models\Product;
use App\Models\Category;
use App\Models\FilterProduct;
use App\Models\SliderImage;
use Illuminate\Http\Request;
```

```
class FrontController extends MyBaseController
{
```

```
    const PAGINATE_LIMIT = 12;
```

```
    public function home()
    {
        $this->data['sliderImages'] = SliderImage::where('active', 1)->get();
```

```
        $this->data['products'] = FilterProduct::where('is_active', 1)->where('brand_active', 1)->paginate(self::PAGINATE_LIMIT);
```

```
        return view("client.pages.home", $this->data);
    }
```

```
    public function about()
    {
        return view('client.pages.about', $this->data);
    }
```

```
    public function products()
    {
        $this->data['categories'] = Category::all();
        $this->data['brands'] = Brand::where('brand_active', 1)->get();
```

```
        $this->data['products'] = FilterProduct::where('is_active', 1)->where('brand_active', 1)->paginate(self::PAGINATE_LIMIT);
```

```
        $this->data['featured_products'] = FilterProduct::where('is_active', 1)->where('brand_active', 1)->where('featured', 1)->take(8)->get();
```

```
        return view("client.pages.products", $this->data);
    }
```

```
    public function product($id)
    {
        $product = Product::with('category')->with('brand')->with('prices')->find($id);
```

```
        if(!$product) {
            return redirect()->route('home.products');
        }
```

```
        $this->data['product'] = $product;
```

```
        $this->data['featured_products'] = FilterProduct::where('is_active', 1)->where('brand_active', 1)->where('featured', 1)->take(8)->get();
```

```
        return view('client.pages.single', $this->data);
    }
```

```
    public function author()
    {
        return view('client.pages.author', $this->data);
    }
```

```
    public function productsFetch(Request $request)
    {
        $productModel = new FilterProduct();
```

```
        $products = $productModel->getProducts($request)->paginate(self::PAGINATE_LIMIT);
```

```
        // dd($products);
```

```
        return response()->json($products);
    }
```

}

3.1.7 LoginController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\User;
use App\Models\UserAction;
use Illuminate\Http\Request;
use Illuminate\Http\Response;
use App\Http\Requests\LoginRequest;
use Illuminate\Support\Facades\Log;
```

```
class LoginController extends MyBaseController
{
```

```
    public function index()
    {
        // dd(session()->get('fromCart'));
    }
```

```
    if(session()->has('fromCart')) {
        $this->data['fromCart'] = true;
    }
```

```
    return view('client.pages.login', $this->data);
}
```

```
    public function store(LoginRequest $request)
    {
```

```
        try {
```

```
            $user = User::where('email', $request->email)
                ->where('password', md5($request->password))
                ->firstOrFail();
```

```
            if($user) {
                $request->session()->put("user", $user);
```

```
                UserAction::create(['action' => 'Login', 'user_id' => $user->id]);
            }
```

```
            if($request->has('fromCart')) {
                return redirect()->route('cart');
            }
        }
```

```

        return redirect()->route('home.products');
    } else {
        // return back()-
>with('LoginFail', 'Wrong combination of email and password.');
```

```

    } catch (\Exception $e) {
        Log::error($e->getMessage());
```

```

        // dd($e->getMessage()); // posto nema usera ulazi u catch
```

```

        return back()-
>with('loginFail', 'Wrong combination of email and password.');
```

```

    }
```

```

}
```

```

}
```

3.1.8 LogoutController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\UserAction;
use Illuminate\Http\Request;
```

```
class LogoutController extends Controller
{
    public function logout(Request $request)
    {
```

```

        UserAction::create(['action' => 'Log out', 'user_id' => $request-
>session()->get('user')->id]);
```

```

        $request->session()->remove('user');
        return redirect()->route('home');
    }
```

```

}
```


3.1.9 MyBaseController

```
<?php

namespace App\Http\Controllers;

use App\Models\Menu;
use Illuminate\Http\Request;

class MyBaseController extends Controller
{
    public $data;

    public function __construct()
    {
        $this->data['menu'] = Menu::orderBy('order')->get();
    }
}
```

3.1.10 OrderController

```
<?php

namespace App\Http\Controllers;

use Exception;
use App\Models\Cart;
use App\Models\Order;
use App\Models\Product;
use App\Models\OrderInfo;
use App\Models\UserAction;
use Illuminate\Http\Request;
use Illuminate\Http\Response;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Log;
use App\Http\Requests\StoreOrderRequest;

class OrderController extends MyBaseController
{

    public function store(StoreOrderRequest $request)
    {
        DB::beginTransaction();
    }
}
```

```
try
{
    $order = Order::create($request->all() + ['is_paid' => 1]);
```

```
    $productsFromCart = Cart::select('product_id', 'quantity')->where('user_id', $request->session()->get('user')->id)->get();
```

```
    // dd($productsFromCart);
```

```
    foreach($productsFromCart as $pid) {
        $product = Product::with('prices')->where('id', $pid->product_id)->first();
```

```
        $orderInfo = OrderInfo::create(['product_id' => $product->id, 'product_name' => $product->name, 'price' => $product->prices[count($product->prices) - 1]->price, 'quantity' => $pid->quantity, 'order_id' => $order->id]);
```

```
    }
```

```
    $removed = Cart::where('user_id', $request->user_id)->delete();
```

```
    UserAction::create(['action' => 'Order completed!', 'user_id' => $request->user_id]);
```

```
    DB::commit();
```

```
    return response(['message' => 'Order is successfully recorded! Thank you!'], Response::HTTP_CREATED);
```

```
    }
    catch (\Exception $e)
    {
        Log::error($e->getMessage());
```

```
    DB::rollBack();
```

```
    dd($e->getMessage());
```

```
    return response(['message'=> 'Order data is Invalid',],Response::HTTP_UNPROCESSABLE_ENTITY);
    }
```

```
}
```

```
public function index()
```

```
{
    $this->data['orders'] = Order::with('order_infos')->get();

    return view('admin.orders.index', $this->data);
}
```

```
}
```

3.1.11 PasswordRecoveryController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\User;
use Illuminate\Http\Request;
use App\Models>PasswordReset;
use Illuminate\Http\Response;
use App\Http\Requests\CreatePasswordRequest;
```

```
class PasswordRecoveryController extends MyBaseController
{
    public function create()
    {
        return view('client.pages.passwordReset', $this->data);
    }
}
```

```
public function reset(Request $request)
{
    $validated = $request->validate([
        'email' => 'required|email'
    ]);
```

```
    $token = random_bytes(32);
```

```
    $url = "http://www.goggles.alemadic.com/password/new?validator=" . bin2hex($token);
```

```
    $expires = date("U") + 3600;
```

```
    $pwd = PasswordReset::where('email', '=', $request->email)->delete();
```

```
    $newPwd = PasswordReset::create(['email' => $request->email, 'token' => password_hash($token, PASSWORD_DEFAULT), 'expires' => $expires]);
```

```

    $subject = "Reset your password for goggles.com";
    $email = "info@goggles.com";

    $message = "<p>We received a password reset request. The link to reset your password is bellow. If you didn't make this request, you can ignore this email</p>";
    $message .= "<p>Here is your password reset link: <br />";
    $message .= "<a href='\$url'>\$url</a></p>";

```

```

    $toEmail = $request->email;
    $body = "<h2>{\$subject}</h2>
            <h4>Email</h4><p>info@goggles.com</p>
            <h4>Message</h4>{\$message}
    ";

```

```

    // Email Headers
    $headers = "MIME-Version: 1.0" . "\r\n";
    $headers .= "Content-Type:text/html;charset=UTF-8" . "\r\n";

```

```

    // Additional Headers
    $headers .= "From: goggles.com " . "<\".$email.\">\" . "\r\n";

```

```

    if(mail($toEmail, $subject, $body, $headers)){
        return response(['message' => 'Check your email!'], Response::HTTP_OK);
    } else {
        return response(['message' => 'Your email was not sent. Try again later'], Response::HTTP_INTERNAL_SERVER_ERROR);
    }

```

```

}

```

```

public function edit()
{
    return view('client.pages.passwordNew', $this->data);
}

```

```

public function update(CreatePasswordRequest $request)
{
    $currentDate = date("U");

```

```

    $passObj = PasswordReset::where("token", "=", $request->validatorToken)
                                ->where("expires", '>=', $currentDate)
                                ->firstOrFail();

```

```
if($passObj) {  
    $userObj = User::where('email', '=', $passObj->email)->first();
```

```
if($userObj) {  
    $userObj->password = md5($request->password);
```

```
$userObj->save();
```

```
return response(['message' => 'You have been successfully changed your password'], Response::HTTP_OK);  
} else {  
    return response(['message' => 'You must submit a new request from the beginning'], Response::HTTP_INTERNAL_SERVER_ERROR);  
}
```

```
} else {  
    return response(['message' => 'You need to re-submit you reset request.'], Response::HTTP_INTERNAL_SERVER_ERROR);
```

```
}
```

```
}
```

```
}
```

3.1.12 ProductController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use Exception;  
use App\Models\Brand;  
use App\Models\Image;  
use App\Models\Price;  
use App\Models\Product;  
use App\Models\Utility;  
use App\Models\Category;  
use App\Models\ImageUpload;  
use Illuminate\Http\Request;  
use App\Models\FilterProduct;  
use Illuminate\Support\Facades\DB;  
use Illuminate\Support\Facades\Log;  
use App\Http\Requests\StoreProductRequest;
```



```
use App\Http\Requests\UpdateProductRequest;
```

```
class ProductController extends MyBaseController  
{
```

```
    const PAGINATE_LIMIT = 10;
```

```
    public function fetchProducts(Request $request)  
    {  
        $productModel = new FilterProduct();
```

```
        if($request->has("number")) {  
            $numberForPagination = $request->number;  
        } else {  
            $numberForPagination = self::PAGINATE_LIMIT;  
        }
```

```
        $products = $productModel->getAdminProducts($request)-  
>paginate($numberForPagination);
```

```
        return response()->json($products);  
    }
```

```
    /**  
     * Display a listing of the resource.  
     *  
     * @return \Illuminate\Http\Response  
     */  
    public function index()  
    {  
        $this->  
>data['products'] = FilterProduct::paginate(self::PAGINATE_LIMIT);
```

```
        return view("admin.products.index", $this->data);  
    }
```

```
    /**  
     * Show the form for creating a new resource.  
     *  
     * @return \Illuminate\Http\Response  
     */  
    public function create()  
    {  
        $this->data['categories'] = Category::all();
```

```
        $this->data['brands'] = Brand::all();
```

```
        return view('admin.products.create', $this->data);
    }
}
```

```
/**
 * Store a newly created resource in storage.
 *
 * @param \Illuminate\Http\Request $request
 * @return \Illuminate\Http\Response
 */
public function store(StoreProductRequest $request)
{
    DB::beginTransaction();
```

```
    try
    {
        $image = ImageUpload::upload($request->name, $request->image);
```

```
        $images = [
            'imageSecond' => ImageUpload::upload($request->name, $request->image2),
            'imageThrid' => ImageUpload::upload($request->name, $request->image3)
        ];
```

```
        $product = Product::create($request->except(['image', 'price', 'image2', 'image3']) + ["image" => $image]);
```

```
        $price = Price::create(['product_id' => $product->id, 'price' => floatval($request->price)]);
```

```
        foreach($images as $image) {
            Image::create(['image' => $image, 'product_id' => $product->id]);
        }
```

```
        DB::commit();
```

```
        return redirect()->route('products.create')->with('success', 'Product added successfully!');
    }
    catch(Exception $e)
    {
        Log::error($e->getMessage());
```

```
        // dd($e->getMessage());
```

```
DB::rollBack();
```

```
        return redirect()->route('products.create')-  
>with('errorMessage', 'A server error occurred!');  
    }
```

```
}
```

```
/**  
 * Display the specified resource.  
 *  
 * @param int $id  
 * @return \Illuminate\Http\Response  
 */  
public function show($id)  
{  
    $this->data['product'] = Product::with('prices')->find($id);
```

```
    return view('client.pages.single', $this->data);  
}
```

```
/**  
 * Show the form for editing the specified resource.  
 *  
 * @param int $id  
 * @return \Illuminate\Http\Response  
 */  
public function edit($id)  
{  
    $this->data['product'] = Product::with('prices')->with('images')->  
>find($id);
```

```
    $this->data['categories'] = Category::all();
```

```
    $this->data['brands'] = Brand::all();
```

```
    return view('admin.products.edit', $this->data);  
}
```

```
/**  
 * Update the specified resource in storage.  
 *  
 * @param \Illuminate\Http\Request $request  
 * @param int $id  
 * @return \Illuminate\Http\Response  
 */
```

```
public function update(UpdateProductRequest $request, $id)
{
    $product = Product::find($id);
```

```
    DB::beginTransaction();
```

```
    try
    {
        $product->update($request-
>except('image', 'image2', 'image3', 'price'));
    }
```

```
    if($request->has('image')) {
        $newImage = ImageUpload::upload($request->name, $request-
>image);
        ImageUpload::delete($product, 'image');
        $product->image = $newImage;
        $product->save();
    }
```

```
    if($request->has('image2')) {
        $imageObj = Image::where('product_id', $product->id)->first();
        $newImage = ImageUpload::upload($request->name, $request-
>image2);
        ImageUpload::delete($product, 'image');
        $imageObj->image = $newImage;
```

```
        $imageObj->save();
```

```
    }
```

```
    if($request->has('image3')) {
        $imageObj = Image::where('product_id', $product->id)-
>orderBy('updated_at', 'desc')->first();
```

```
        $newImage = ImageUpload::upload($request->name, $request-
>image2);
        ImageUpload::delete($product, 'image');
        $imageObj->image = $newImage;
```

```
        $imageObj->save();
```

```
    }
```

```
    if($product->prices[count($product->prices) - 1]-
>price != $request->price) {
        Price::create(['product_id' => $product-
>id, 'price' => floatval($request->price)]);
    }
```

```
}
```

```
DB::commit();
```

```
        return redirect()->route('products.index')-  
>with('success', 'Product updated successfully!');
```

```
    }  
    catch(Exception $e) {  
        Log::error($e->getMessage());
```

```
        DB::rollBack();  
  
        // dd($e->getMessage());  
        return redirect()->route('products.edit', $product->id)-  
>with('errorMessage', 'A server error occurred!');  
    }  
  
}
```

```
/**  
 * Remove the specified resource from storage.  
 *  
 * @param int $id  
 * @return \Illuminate\Http\Response  
 */  
public function destroy($id)  
{
```

```
DB::beginTransaction();
```

```
    try  
    {  
        $product = Product::find($id);  
  
        $product->prices()->delete();  
  
        $product->images()->delete();  
  
        $product->delete();  
        Utility::deleteDirectory(public_path() . "/assets/images/$product  
->name");
```

```
DB::commit();
```

```
        return redirect()->route('products.index')-  
>with('success', 'Product deleted successfully!');
```

```
}  
catch(Exception $e)  
{  
    Log::error($e->getMessage());
```

```
// dd($e->getMessage());
```

```
DB::rollBack();
```

```
        return redirect()->route('products.index')-  
>with('errorMessage', 'Product can not be deleted, because it is contained in  
orders!');  
    }
```

```
    }  
}
```

3.1.13 RegisterController

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use App\Models\User;  
use Illuminate\Http\Request;  
use Illuminate\Http\Response;  
use Illuminate\Support\Facades\DB;  
use Illuminate\Support\Facades\Log;  
use App\Http\Requests\RegisterUserRequest;  
use App\Models\UserAction;
```

```
class RegisterController extends MyBaseController  
{
```

```
    public function index()  
    {  
        return view("client.pages.register", $this->data);  
    }
```

```
    public function store(RegisterUserRequest $request)  
    {
```

```
$role_id = 2;
```

```
DB::beginTransaction();
```

```
try {  
    //store user  
    $user = User::create([  
        'first_name' => $request->first_name,  
        'last_name' => $request->last_name,  
        'email' => $request->email,  
        'password' => md5($request->password),  
        'role_id' => $role_id,  
    ]);
```

```
    UserAction::create(['action' => 'Registration', 'user_id' => $user->id]);
```

```
DB::commit();
```

```
    return back()-  
>with('registerSuccess', 'You have successfully registered!');
```

```
    } catch(\Exception $e) {  
        DB::rollBack();
```

```
Log::error($e->getMessage());
```

```
    return back()->with('registerError', 'Try again!');
```

```
}
```

```
    //sign the user in  
    // auth()->attempt($request->  
>only('email', 'password')); // user model or null
```

```
    //redirect  
    // return redirect()->route('dashboard');  
}
```

```
}
```

3.1.14 UserActionController

```
<?php

namespace App\Http\Controllers;

use App\Models\UserAction;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\DB;

class UserActionController extends MyBaseController
{
    public function index()
    {
        $this->data['actions'] = UserAction::with('user')->get();

        return view('admin.actions.index', $this->data);
    }

    public function filter(Request $request)
    {
        $date = date("Y-m-d", strtotime($request->date));

        $actions = UserAction::with('user');

        if($request->selectAll == 'false') {
            $actions = $actions->whereRaw("DATE(created_at) = '$date'");
        }

        // $actions = UserAction::where('created_at', '=', $date)->get();
        $actions = $actions->get();

        return response()->json($actions);
    }
}
```


3.1.15 CheckAdmin Middleware

```
<?php

namespace App\Http\Middleware;

use Closure;
use Illuminate\Http\Request;

class CheckAdmin
{
    /**
     * Handle an incoming request.
     *
     * @param \Illuminate\Http\Request $request
     * @param \Closure $next
     * @return mixed
     */
    public function handle(Request $request, Closure $next)
    {
        if(!$request->session()->has('user')) {
            return redirect()->route('login');
        }

        if($request->session()->get('user')->role_id != 1) {
            return redirect()->route('home.products');
        }

        return $next($request);
    }
}
```

3.1.16 CheckLogin Middleware

```
<?php

namespace App\Http\Middleware;

use Closure;
use Illuminate\Http\Request;
```

```

class CheckLogin
{
    /**
     * Handle an incoming request.
     *
     * @param \Illuminate\Http\Request $request
     * @param \Closure $next
     * @return mixed
     */
    public function handle(Request $request, Closure $next)
    {
        if($request->session()->has("user")) {
            return $next($request);
        }

        return redirect()->route('login');
    }
}

```

3.1.17 ContactRequest

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

```

```

class ContactRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }
}

```

```

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {

```

```

        return [
            'name' => 'required|max:255|min:3|regex:/^[\\pL\\s\\-]+$/u',
            'email' => 'required|email',
            'subject' => 'required|regex:/^[\\pL\\s\\-]{5,}$/u',
            'message' => 'required|regex:/^[\\pL\\s\\-]{10,}$/u'
        ];
    }
}

```

3.1.18 CreatePasswordRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```

class CreatePasswordRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }
}

```

```

    /**
     * Get the validation rules that apply to the request.
     *
     * @return array
     */
    public function rules()
    {
        return [
            'password' => 'required|confirmed'
        ];
    }
}

```

3.1.19 LoginRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class LoginRequest extends FormRequest
```

```
{
```

```
    /**
```

```
     * Determine if the user is authorized to make this request.
```

```
     *
```

```
     * @return bool
```

```
     */
```

```
    public function authorize()
```

```
    {
```

```
        return true;
```

```
    }
```

```
    /**
```

```
     * Get the validation rules that apply to the request.
```

```
     *
```

```
     * @return array
```

```
     */
```

```
    public function rules()
```

```
    {
```

```
        return [
```

```
            'email' => 'required|email|max:255|',
```

```
            'password' => 'required',
```

```
        ];
```

```
    }
```

```
}
```

3.1.20 RegisterUserRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class RegisterUserRequest extends FormRequest
```

```
{
```

```
    /**
```

```
     * Determine if the user is authorized to make this request.
```

```
     *
```

```
     * @return bool
```

```
     */
```

```
    public function authorize()
```

```
    {
```

```
        return true;
```

```
    }
```

```
    /**
```

```
     * Get the validation rules that apply to the request.
```

```
     *
```

```
     * @return array
```

```
     */
```

```
    public function rules()
```

```
    {
```

```
        return [
```

```
            'first_name' => 'required|max:255|min:3|regex:/^[pL\s\-\-]+$/',
```

```
            'last_name' => 'required|max:255|min:3|regex:/^[pL\s\-\-]+$/',
```

```
            'email' => 'required|email|max:255|unique:users',
```

```
            'password' => 'required|confirmed',
```

```
        ];
```

```
    }
```

```
}
```

3.1.21 StoreBrandRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class StoreBrandRequest extends FormRequest
```

```
{
```

```
    /**
```

```
     * Determine if the user is authorized to make this request.
```

```
     *
```

```
     * @return bool
```

```
     */
```

```
    public function authorize()
```

```
    {
```

```
        return true;
```

```
    }
```

```
    /**
```

```
     * Get the validation rules that apply to the request.
```

```
     *
```

```
     * @return array
```

```
     */
```

```
    public function rules()
```

```
    {
```

```
        return [
```

```
            'brand_name' => 'required|string|max:255',
```

```
            'brand_active' => 'required|regex:/^[01]$/'
```

```
        ];
```

```
    }
```

```
}
```

3.1.22 StoreOrderRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class StoreOrderRequest extends FormRequest
```

```
{
```

```
    /**
```

```
     * Determine if the user is authorized to make this request.
```

```
     *
```

```
     * @return bool
```

```
     */
```

```
    public function authorize()
```

```
    {
```

```
        return true;
```

```
    }
```

```
    /**
```

```
     * Get the validation rules that apply to the request.
```

```
     *
```

```
     * @return array
```

```
     */
```

```
    public function rules()
```

```
    {
```

```
        return [
```

```
            'name' => 'required|max:255|min:3|regex:/^[\\pL\\s\\-]+$/',
```

```
            'user_id' => 'required|exists:users,id',
```

```
            'phone' => ['required', 'regex:/^(\\+[\\d]{2,3}|0[\\d]{2,3})[\\d]{6,10}$/'],
```

```
            'country' => 'required|string|min:3|max:255',
```

```
            'city' => 'required|string|min:3|max:255',
```

```
            // 'address' => 'required|min:10|max:255',
```

```
            'address' => ['required', 'regex:/^[\\pL\\s\\-\\d]{10,255}$/'],
```

```
            'card_number' => 'required|string|regex:/^[\\d]{16}$/',
```

```
            'cvv' => 'required|regex:/^[\\d]{2,3}$/'
```

```
        ];
```

```
    }
```

```
}
```

3.1.23 StoreProductRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class StoreProductRequest extends FormRequest
```

```
{
```

```
    /**
```

```
     * Determine if the user is authorized to make this request.
```

```
     *
```

```
     * @return bool
```

```
     */
```

```
    public function authorize()
```

```
    {
```

```
        return true;
```

```
    }
```

```
    /**
```

```
     * Get the validation rules that apply to the request.
```

```
     *
```

```
     * @return array
```

```
     */
```

```
    public function rules()
```

```
    {
```

```
        return [
```

```
            'name' => 'required|string|max:255',
```

```
            'price' => 'required|numeric',
```

```
            'description' => 'required',
```

```
            'image' => 'required|image|max:4000',
```

```
            'image2' => 'required|image|max:4000',
```

```
            'image3' => 'required|image|max:4000',
```

```
            'category_id' => 'required|exists:categories,id',
```

```
            'brand_id' => 'required|exists:brands,id',
```

```
            'gender_id' => 'required|regex:/^[01]$/',
```

```
            'is_active' => 'regex:/^[01]$/',
```

```
            'featured' => 'regex:/^[01]$/',
```

```
        ];
```

```
    }
```

```
}
```


3.1.24 UpdateBrandRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class UpdateBrandRequest extends FormRequest
{
    /**
     * Determine if the user is authorized to make this request.
     *
     * @return bool
     */
    public function authorize()
    {
        return true;
    }
}
```

```
/**
 * Get the validation rules that apply to the request.
 *
 * @return array
 */
public function rules()
{
    return [
        'brand_name' => 'required|string|max:255',
        'brand_active' => 'required|regex:/^[01]$/'
    ];
}
```

3.1.25 UpdateProductRequest

```
<?php
```

```
namespace App\Http\Requests;
```

```
use Illuminate\Foundation\Http\FormRequest;
```

```
class UpdateProductRequest extends FormRequest
```

```
{
```

```
    /**
```

```
     * Determine if the user is authorized to make this request.
```

```
     *
```

```
     * @return bool
```

```
     */
```

```
    public function authorize()
```

```
    {
```

```
        return true;
```

```
    }
```

```
    /**
```

```
     * Get the validation rules that apply to the request.
```

```
     *
```

```
     * @return array
```

```
     */
```

```
    public function rules()
```

```
    {
```

```
        return [
```

```
            'name' => 'required|string|max:255',
```

```
            'price' => 'required|numeric',
```

```
            'description' => 'required',
```

```
            'image' => 'image|max:4000',
```

```
            'image2' => 'image|max:4000',
```

```
            'image3' => 'image|max:4000',
```

```
            'category_id' => 'required|exists:categories,id',
```

```
            'brand_id' => 'required|exists:brands,id',
```

```
            'gender_id' => 'required|regex:/^[01]$/',
```

```
            'is_active' => 'regex:/^[01]$/',
```

```
            'featured' => 'regex:/^[01]$/',
```

```
        ];
```

```
    }
```

```
}
```

3.1.26 Brand

```
<?php
```

```
namespace App\Models;
```

```
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Database\Eloquent\SoftDeletes;
```

```
class Brand extends Model
{
    use HasFactory;
```

```
    protected $fillable = [
        'brand_name',
        'brand_active',
    ];
```

```
    public function products()
    {
        return $this->hasMany(Product::class);
    }
}
```

3.1.27 Cart

```
<?php
```

```
namespace App\Models;
```

```
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
```

```
class Cart extends Model
{
    use HasFactory;
```

```
    public function products()
    {
        // return $this->belongsToMany()
    }
}
```

3.1.28 Category

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Category extends Model
{
    use HasFactory;

    public function products()
    {
        return $this->hasMany(Product::class);
    }
}
```

3.1.29 FilterProduct

```
<?php

namespace App\Models;

use Illuminate\Http\Request;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Database\Eloquent\Factories\HasFactory;

class FilterProduct extends Model
{
    use HasFactory;

    protected $table = 'products_view';

    public function getProducts(Request $request)
    {
        $products = new FilterProduct();

        $products = $products->where('is_active', 1);
        $products = $products->where('brand_active', 1);

        if($request->has('categories')) {
            $products = $products->whereIn('category_id', $request->categories);
        }

        if($request->has('brands')) {
            $products = $products->whereIn('brand_id', $request->brands);
        }

        if($request->has('gender') && $request->gender != -10) {
            $products = $products->where('gender_id', $request->gender);
        }

        if($request->has('keyword') && $request->keyword != '') {
            $keyword = strtolower($request->keyword);

            $products = $products->where('name', 'like', '%' . $keyword . '%');
        }
    }
}
```

```
if($request->has('sort')) {  
    $sort = $request->sort;
```

```
    $sortArr = explode("_", $sort);
```

```
    if($sortArr[0] == 'p') {  
        $products = $products->orderBy('price', $sortArr[1]);  
    } else {  
        $products = $products->orderBy('name', $sortArr[1]);  
    }  
}
```

```
}
```

```
return $products;
```

```
}
```

```
public function getAdminProducts(Request $request)  
{  
    $products = new FilterProduct();
```

```
    if($request->has('keyword') && $request->keyword != '') {  
        $keyword = strtolower($request->keyword);
```

```
        $products = $products->  
>where('name', 'like', '%' . $keyword . '%');  
    }
```

```
    if($request->has('sort')) {  
        $sort = $request->sort;
```

```
        $sortArr = explode("_", $sort);
```

```
        if($sortArr[0] == 'p') {  
            $products = $products->orderBy('price', $sortArr[1]);
```

```
        } else {  
            $products = $products->orderBy('name', $sortArr[1]);  
        }  
    }
```

```
}
```

```
return $products;
```

```
}
```

}

3.1.30 Image

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Image extends Model
{
    use HasFactory;

    protected $fillable = ["image", "alt", "product_id"];

    public function prices()
    {
        return $this->belongsTo(Product::class);
    }
}
```

3.1.31 ImageUpload

```
<?php

namespace App\Models;

class ImageUpload
{
    public static function upload($folderName, $image){
        $imageName = time() . '_' . $image->getClientOriginalName();

        $result = $image->move(public_path() . "/assets/images/$folderName/", $imageName);

        if($result) {
            return $imageName;
        }

        return false;
    }
}
```



```

        public static function delete($product, $prop){
            // Storage::disk('public')->delete('assets/img/' . $image);
            $oldImagePath = public_path() . "/assets/images/$product-
>name/" . $product->$prop;

            if(file_exists($oldImagePath)) {
                return unlink($oldImagePath);
            }
        }
    }
}

```

```

}

```

3.1.32 Menu

```

<?php

```

```

namespace App\Models;

```

```

use Illuminate\Database\Eloquent\Factories\HasFactory;

```

```

use Illuminate\Database\Eloquent\Model;

```

```

class Menu extends Model

```

```

{

```

```

    use HasFactory;

```

```

}

```

3.1.33 Order

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Order extends Model
{
    use HasFactory;

    protected $fillable = [
        'name',
        'user_id',
        'phone',
        'country',
        'city',
        'address',
        'card_number',
        'cvv',
        'is_paid',
        'total_price'
    ];

    public function order_infos() {
        return $this->hasMany(OrderInfo::class);
    }
}
```

3.1.34 OrderInfo

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class OrderInfo extends Model
{
    use HasFactory;
```

```
protected $fillable = [  
    'product_id',  
    'product_name',  
    'price',  
    'quantity',  
    'order_id',  
];
```

```
public function orders() {  
    return $this->belongsTo(Order::class);  
}  
  
}
```

3.1.35 PasswordReset

```
<?php
```

```
namespace App\Models;
```

```
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;
```

```
class PasswordReset extends Model  
{  
    use HasFactory;
```

```
protected $fillable = [  
    'email',  
    'token',  
    'expires',  
];
```

```
public $timestamps = false;  
}
```

3.1.36 Price

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Price extends Model
{
    use HasFactory;

    protected $fillable = ["product_id", "price"];

    public function product()
    {
        return $this->belongsTo(Product::class);
    }
}
```

3.1.37 Product

```
<?php
```

```
namespace App\Models;
```

```
use Exception;
use Illuminate\Http\Request;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Support\Facades\Storage;
use Illuminate\Database\Eloquent\Factories\HasFactory;
```

```
class Product extends Model
{
    use HasFactory;
```

```
    protected $fillable = ['name', 'image', 'description', 'category_id', 'featured', 'is_active', 'gender_id', 'brand_id'];
```

```
    public function prices()
    {
        return $this->hasMany(Price::class);
        // ->orderBy('created_at', 'desc');
    }
```

```
    public function images()
    {
        return $this->hasMany(Image::class);
    }
```

```
    public function category()
    {
        return $this->belongsTo(Category::class);
    }
```

```
    public function brand()
    {
        return $this->belongsTo(Brand::class);
    }
```

```
}
```

3.1.38 Role

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Role extends Model
{
    use HasFactory;
}
```

3.1.39 SliderImage

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class SliderImage extends Model
{
    use HasFactory;
}
```

3.1.40 User

```
<?php
```

```
namespace App\Models;
```

```
use Illuminate\Contracts\Auth\MustVerifyEmail;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Foundation\Auth\User as Authenticatable;
use Illuminate\Notifications\Notifiable;
```

```
class User extends Authenticatable
{
    use HasFactory, Notifiable;
```

```
    /**
     * The attributes that are mass assignable.
     *
     * @var array
     */
    protected $fillable = [
        'first_name',
        'last_name',
        'email',
        'password',
        'role_id',
    ];
```

```
    /**
     * The attributes that should be hidden for arrays.
     *
     * @var array
     */
    protected $hidden = [
        'password',
        'remember_token',
    ];
```

```
    /**
     * The attributes that should be cast to native types.
     *
     * @var array
     */
    protected $casts = [
        'email_verified_at' => 'datetime',
```

```
];
```

```
public function actions()
{
    return $this->hasMany(UserAction::class);
}

}
```

3.1.41 UserAction

```
<?php
```

```
namespace App\Models;
```

```
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
```

```
class UserAction extends Model
{
    use HasFactory;
```

```
protected $fillable = [
    'action',
    'user_id'
];
```

```
public function user()
{
    return $this->belongsTo(User::class);
}
```

```
}
```


3.1.42 Utility

```
<?php
```

```
namespace App\Models;
```

```
abstract class Utility  
{
```

```
    public static function deleteDirectory($dir) {  
        if (!file_exists($dir)) {  
            return true;  
        }  
  
        if (!is_dir($dir)) {  
            return unlink($dir);  
        }  
  
        foreach (scandir($dir) as $item) {  
            if ($item == '.' || $item == '..') {  
                continue;  
            }  
  
            if (!self::deleteDirectory($dir . '/' . $item)) {  
                return false;  
            }  
        }  
  
        return rmdir($dir);  
    }  
}
```

```
}
```

3.2 Blade

3.2.1 client.layout

```
<!DOCTYPE html>
<html lang="en">

<head>
```

```
    @include('client.fixed.head')

</head>
```

```
<body>
```

```
    @include('client.fixed.header')
```

```
    @yield('banner')
```

```
    @yield('content')
```

```
    @include('client.fixed.footer')
```

```
    @include('client.fixed.commonScripts')
```

```
    @yield('pageScripts')
```

```
</body>
```

```
</html>
```

3.2.2 client.fixed.head

```
<title>@yield('title')</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta charset="utf-8" />
<meta name="keywords" content="@yield('keywords')" />
<meta name="description" content="@yield('description')" />

<meta name="csrf-token" content="{{ csrf_token() }}">
```

```
<script>
    addEventListener("load", function () {
        setTimeout(hideURLbar, 0);
    }, false);
```

```
        function hideURLbar() {
            window.scrollTo(0, 1);
        }
    </script>
    <link href="{{ asset('assets/css/bootstrap.css') }}" rel='stylesheet' type='text/css' />
    <link href="{{ asset('assets/css/login_overlay.css') }}" rel='stylesheet' type='text/css' />
    <link href="{{ asset('assets/css/style6.css') }}" rel='stylesheet' type='text/css' />
    {{--
    <link rel="stylesheet" href="{{ asset('assets/css/shop.css') }}" type="text/css" /> --}}
    <link rel="stylesheet" href="{{ asset('assets/css/owl.carousel.css') }}" type="text/css" media="all" />
    <link rel="stylesheet" href="{{ asset('assets/css/owl.theme.css') }}" type="text/css" media="all" />
```

```
    <link rel="stylesheet" type="text/css" href="{{ asset('assets/css/jquery-ui1.css') }}">
    <link href="{{ asset('assets/css/easy-responsive-tabs.css') }}" rel='stylesheet' type='text/css' />
    <link rel="stylesheet" href="{{ asset('assets/css/flexslider.css') }}" type="text/css" media="screen" />
```

```
    <link href="{{ asset('assets/css/style.css') }}" rel='stylesheet' type='text/css' />
    <link href="{{ asset('assets/css/fontawesome-all.css') }}" rel="stylesheet" />
    <link href="//fonts.googleapis.com/css?family=Inconsolata:400,700" rel="stylesheet" />
```

```
<link href="//fonts.googleapis.com/css?family=Poppins:100,100i,200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800"
      rel="stylesheet" />
```

3.2.3 client.fixed.header

```
<div class="banner-top container-fluid" id="home">
  <!-- header -->
  <header>
    <div class="row">
      <div class="col-md-4 top-info text-left mt-lg-4">
        <h6>Need Help</h6>
        <ul>
          <li>
            <i class="fas fa-phone"></i> Call</li>
          <li class="number-phone mt-3">+121 098 8907 9987</li>
        </ul>
      </div>
      <div class="col-md-4 logo-w3layouts text-center">
        <h1 class="logo-w3layouts">
          <a class="navbar-brand" href="{{ route('home') }}">
            Goggles </a>
          </h1>
        </div>

      <div class="col-md-4 top-info-cart text-right mt-lg-4">
        <ul class="cart-inner-info">
```

```
@if(session()->has('user'))
```

```
<li class="button-logout">
  <a href="{{ route('logout') }}">Log out
  </a>
</li>
```

```
@else
```

```
{{-- Login button --}}
<li class="">
  <a class="btn-open" href="{{ route('register') }}"> Register
  </a>
</li>
```

```
<li class="">
```

```

        <a class="btn-
open" href="{ route('login') }}"> Login
        </a>
    </li>

```

```

    @endif

```

```

        <li class="galssescart galssescart2 cart cart box_1">
            {{-- <form action="#" method="post" class="last">
                <input type="hidden" name="cmd" value="_cart">
                <input type="hidden" name="display" value="1"> --
            }}

            <a class="top_google_cart" href="{ route('cart')
            }}">

                My Cart
                <i class="fas fa-cart-arrow-down"></i>
            </a>
            {{-- </form> --}}
        </li>
    </ul>
<!-->

```

```

<div class="overlay-login text-left">
    <button type="button" class="overlay-close1">
        <i class="fa fa-times" aria-hidden="true"></i>
    </button>
    <div class="wrap">
        <h5 class="text-center mb-4">Login Now</h5>
        <div class="login p-5 bg-dark mx-auto mw-100">

```

```

<div class="loginResponse"></div>

```

```

        <form action="#" method="post">
            <div class="form-group">
                <label class="mb-
2" for="loginEmail">Email address</label>
                <input type="email" class="form-
control" id="loginEmail" aria-
describedby="emailHelp" placeholder="" required="">
                <small id="emailHelp" class="form-
text text-muted">We'll never share your email with anyone else.</small>
            </div>
            <div class="form-group">
                <label class="mb-
2" for="loginPassword">Password</label>
                <input type="password" class="form-
control" id="loginPassword" placeholder="" required="">
            </div>

```

```

        {{-- <div class="form-check mb-2">
            <input type="checkbox" class="form-check-
input" id="exampleCheck1">
                <label class="form-check-
label" for="exampleCheck1">Check me out</label>
            </div> --}}

```

```

        <button type="button" class="btn btn-
primary submit mb-4" id="btnLogin">Sign In</button>

```

```

        <div>
            <a href="{{ route('register') }}">Don't h
ave account? Register here</a>
        </div>

```

```

        </form>
    </div>
    <!-->
</div>
</div>
<!-->
</div>
</div>

<label class="top-log mx-auto"></label>
<nav class="navbar navbar-expand-lg navbar-light bg-light top-
header mb-2">

```

```

        <button class="navbar-toggler mx-auto" type="button" data-
toggle="collapse" data-target="#navbarSupportedContent" aria-
controls="navbarSupportedContent"
            aria-expanded="false" aria-label="Toggle navigation">
            <span class="navbar-toggler-icon">

                </span>
        </button>
        <div class="collapse navbar-
collapse" id="navbarSupportedContent">
            <ul class="navbar-nav nav-mega mx-auto">

```

```

                @foreach($menu as $link)
                    <li class="nav-item">
                        <a class="nav-link @if(request()->routeIs($link-
>route)) active @endif" href="{{ route($link->route ) }}" >{{ $link-
>title }}</a>
                    </li>
                @endforeach

```

```
</ul>
```

```
    </div>  
  </nav>  
</header>  
<!-- //header -->
```

3.2.4 client.fixed.footer

```
<!--footer -->
<footer class="py-lg-5 py-3">
  <div class="container-fluid px-lg-5 px-3">
    <div class="row footer-top-w3layouts">
      <div class="col-lg-4 footer-grid-w3ls">
        <div class="footer-title">
          <h3>About Us</h3>
        </div>
        <div class="footer-text">
          <p>The Goggles Shop is dedicated to providing you with the highest standards of professional eye care, together with a friendly service, quality products and excellent value.</p>
          <ul class="footer-social text-left mt-lg-4 mt-3">
            <li class="mx-2">
              <a href="https://www.facebook.com/" target="_blank">
                <span class="fab fa-facebook-f"></span>
              </a>
            </li>
            <li class="mx-2">
              <a href="https://www.twitter.com/" target="_blank">
                <span class="fab fa-twitter"></span>
              </a>
            </li>
            <li class="mx-2">
              <a href="https://www.linkedin.com" target="_blank">
                <span class="fab fa-linkedin-in"></span>
              </a>
            </li>
            <li class="mx-2">
              <a href="#">
                <span class="fas fa-rss"></span>
              </a>
            </li>
          </ul>
        </div>
      </div>
      <div class="col-lg-4 footer-grid-w3ls">
        <div class="footer-title">
          <h3>Get in touch</h3>
        </div>
```



```

        <div class="contact-info">
            <h4>Location :</h4>
            <p>0926k 4th block building, king Avenue, San Francis
co</p>

            <div class="phone">
                <h4>Contact :</h4>
                <p>Phone : +121 098 8907 9987</p>
                <p>Email :
                    <a href="mailto:info@example.com">info@goggle
s.com</a>

                </p>
            </div>
        </div>
    </div>
    <div class="col-lg-4 footer-grid-w3ls">
        <div class="footer-title">
            <h3>Quick Links</h3>
        </div>
        <ul class="links">
            <li>
                <a href="{ route('home') }">Home</a>
            </li>
            <li>
                <a href="{ route('about') }">About</a>
            </li>
            <li>
                <a href="{ route('home.products') }">Shop</a>
            </li>
            <li>
                <a href="{ route('contact') }">Contact Us</a>
            </li>
        </ul>
    </div>

    </div>
    <div class="copyright-w3layouts mt-4">
        <p class="copy-right text-
center ">&copy; 2021 Goggles. All Rights Reserved | </a>
        </p>
    </div>
</div>
</footer>
<!-- //footer -->

```

3.2.5 client.fixed.commonScripts

```
<!--jQuery-->
<script src="{{ asset('assets/js/jquery-2.2.3.min.js') }}"></script>
<!-- newsletter modal -->

<!--search jQuery-->
<script src="{{ asset('assets/js/modernizr-2.6.2.min.js') }}"></script>
<script src="{{ asset('assets/js/classie-search.js') }}"></script>
<!--//search jQuery-->
<!-- cart-js -->
<script src="{{ asset('assets/js/minicart.js') }}"></script>
<script>
    googles.render();
```

```
googles.cart.on('googles_checkout', function (evt) {
    var items, len, i;
```

```
    if (this.subtotal() > 0) {
        items = this.items();
```

```
        for (i = 0, len = items.length; i < len; i++) {}
    }
});
</script>
<!-- //cart-js -->
<script>
    $(document).ready(function () {
        $(".button-log a").click(function () {
            $(".overlay-login").fadeToggle(200);
            $(this).toggleClass('btn-open').toggleClass('btn-close');
        });
    });
    $('.overlay-close1').on('click', function () {
        $(".overlay-login").fadeToggle(200);
        $(".button-log a").toggleClass('btn-open').toggleClass('btn-
close');
        open = false;
    });
</script>
<!-- carousel -->
```

```
<!-- dropdown nav -->
<script>
    $(document).ready(function () {
```

```

        $(".dropdown").hover(
            function () {
                $('.dropdown-
menu', this).stop(true, true).slideDown("fast");
                $(this).toggleClass('open');
            },
            function () {
                $('.dropdown-
menu', this).stop(true, true).slideUp("fast");
                $(this).toggleClass('open');
            }
        );
    });
</script>
<!-- //dropdown nav -->
<script src="{ asset('assets/js/move-top.js') }"></script>
<script src="{ asset('assets/js/easing.js') }"></script>
<script>
    jQuery(document).ready(function($) {
        $(".scroll").click(function(event) {
            event.preventDefault();
            $('html,body').animate({
                scrollTop: $(this.hash).offset().top
            }, 900);
        });
    });
</script>
<script>
    $(document).ready(function() {
        /*
           var defaults = {
               containerID: 'toTop', // fading ele
ment id
               containerHoverID: 'toTopHover', // fa
ding element hover id
               scrollSpeed: 1200,
               easingType: 'linear'
           };
        */

```

```

        $.UItoTop({
            easingType: 'easeOutQuart'
        });

```

```

    });
</script>
<!--// end-smoth-scrolling -->

```

```
<script src="{{ asset('assets/js/bootstrap.js') }}"></script>
<!-- js file -->
```

```
<script type="text/javascript">
    const baseUrl = "{{url('/')}}";
    const publicFolder = "{{asset('/')}}";
</script>
```

```
<script src="{{ asset('assets/js/script.js') }}"></script>
```

3.2.6 client.components.banner

```
<!-- banner -->
<div class="banner_inner">
    <div class="services-breadcrumb">
        <div class="inner_breadcrumb">

            <ul class="short">
                <li>
                    <a href="index.html">Home</a>
                    <i>|</i>
                </li>
                <li>{{ $bannerTitle }}</li>
            </ul>
        </div>
    </div>
</div>
```

```
</div>
<!--//banner -->
</div>
<!--// header_top -->
```

3.2.7 client.components.product

```
<div class="col-md-3 product-men women_two my-3">
  <div class="product-google-info googles">
    <div class="men-pro-item">
      <div class="men-thumb-item">
        image) }}" class="img-fluid" alt="" />
        <div class="men-cart-pro">
          <div class="inner-men-cart-pro">
            <a href="{{ route('home.products.show', ['pro
duct' => $product->id]) }}" class="link-product-add-cart">View</a>
          </div>
        </div>
        {{-- <span class="product-new-top">New</span> --}}
      </div>
      <div class="item-info-product">
        <div class="info-product-price">
          <div class="grid_meta">
            <div class="product_price">
              <h4>
                <a href="{{ route('home.products.show
', ['product' => $product->id]) }}">{{ $product->name }}</a>
              </h4>
              <div class="grid-price mt-2">
                <span class="money ">{{ $product-
>price}}</span>
              </div>
            </div>
          </div>
        </div>
        <div class="googles single-item hvr-outline-out">

          <form action="#" method="post">
```

```
      {{--
      <input type="hidden" name="cmd" value="_cart">
        <input type="hidden" name="add" value="{{
$product->id }}" />
        <input type="hidden" name="googles_item"
value="{{ $product->name }}" />
        <input type="hidden" name="amount" value=
"{{ $product->prices[count($product->prices) - 1]->price }}" />
        <button type="submit" class="googles-
cart pgoogles-cart">
          <i class="fas fa-cart-plus"></i>
```

```
</button> --}}
```

```
    {{--  
    <input type="hidden" class="" name="product" value="{{ $product->id }}" /> -  
    -}}
```

```
        <button type="button" class="googles-  
cart pgoogles-cart cartBtn" data-productid="{{ $product->id }}">  
            <i class="fas fa-cart-plus"></i>  
        </button>
```

```
</form>
```

```
        </div>  
    </div>  
    <div class="clearfix"></div>  
    </div>  
    </div>  
    </div>  
    </div>
```

3.2.8 client.components.featuredProduct

```
<div class="item">
  <div class="gd-box-info text-center">
    <div class="product-men women_two bot-gd">
      <div class="product-googlees-info slide-img googlees">
        <div class="men-pro-item">
          <div class="men-thumb-item">
            name }}" />

          <div class="men-cart-pro">
            <div class="inner-men-cart-pro">
              <a href="{{ route('home.products.show', ['pro
duct' => $f_product->id]) }}" class="link-product-add-cart">Quick View</a>
            </div>
          </div>
          {{-- <span class="product-new-top">New</span> --}}
        </div>
        <div class="item-info-product">

          <div class="info-product-price">
            <div class="grid_meta">
              <div class="product_price">
                <h4>
                  <a href="{{ route('home.products.show
', ['product' => $product->id]) }}">{{ $product->name }}</a>
                </h4>
                <div class="grid-price mt-2">
                  <span class="money ">${{ $f_product-
>price}}</span>

                </div>
              </div>
            </div>

            </div>
            <div class="googlees single-item hvr-outline-out">
              <form action="#" method="post">
                {{--
                <input type="hidden" name="cmd" value="_cart">
                  <input type="hidden" name="add" value="1"
>
                  <input type="hidden" name="googlees_item"
value="Fastrack Aviator">
                  <input type="hidden" name="amount" value=
"325.00">
                  <button type="submit" class="googlees-
cart pgooglees-cart">
```

```
        <i class="fas fa-cart-plus"></i>  
    </button> --}}  
</div>
```

```
        <button type="button" class="googles-  
cart pgoogles-cart cartBtn" data-productid="{{ $product->id }}">  
            <i class="fas fa-cart-plus"></i>  
        </button>  
    </div>
```

```
</form>
```

```
</div>  
</div>
```

```
        </div>  
    </div>  
</div>  
</div>  
</div>  
</div>
```


3.2.9 client.pages.about

```
@extends('client.layout')
```

```
@section('title') Goggles | About us @endsection
```

```
@section('keywords') goggles, about us, about goggles, optic store, sunglasse  
s, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Shop for high-  
quality glasses and sunglasses at Goggles.com. Find more information about us.  
@endsection
```

```
@section('banner')
```

```
@include('client.components.banner', ['bannerTitle' => "About"])
```

```
@endsection
```

```
@section('content')
```

```
<section class="banner-bottom-wthreelayouts py-lg-5 py-3">  
  <div class="container-fluid">
```

```
    <div class="inner-sec-shop px-lg-4 px-3">  
      <div class="about-content py-lg-5 py-3">  
        <div class="row">
```

```
          <div class="col-lg-6 p-0">  
              
          </div>  
          <div class="col-lg-6 about-info">  
            <h3 class="tittle-w3layouts text-left mb-lg-5 mb-3">About Us</h3>  
  
            <p class="my-xl-4 my-lg-3 my-md-4 my-3"> The Goggles is dedicated to providing you with the highest standards of p  
rofessional eye care, together with a friendly service, quality products and  
excellent value. As an established independent opticians, we are free to sele  
ct the best products from any manufacturer. This means we are able to offer y  
ou a wide choice of eyewear with quality frames. Our commitment to quality ex  
tends to the people who look after your eyesight.  
          </p>
```

```
            <a href="shop.html" class="btn btn-sm animated-  
button gibson-three mt-4">Shop Now</a>
```

```
        </div>
    </div>
</div>
```

```
<!-- /grids -->
<div class="bottom-sub-grid-content py-lg-5 py-3">
    <div class="row">
        <div class="col-lg-4 bottom-sub-grid text-center">
            <div class="bt-icon">
```

```
                <span class="far fa-hand-paper"></span>
            </div>
```

```
                <h4 class="sub-tittle-w3layouts my-lg-4 my-3">Satisfaction Guaranteed</h4>
                <p>Duis mollis, est non commodo luctus, nisi erat porttitor ligula, eget lacinia odio sem nec elit.</p>
                <p>
                    <a href="shop.html" class="btn btn-sm animated-button gibson-three mt-4">Shop Now</a>
                </p>
            </div>
<!-- /.col-lg-4 -->
<div class="col-lg-4 bottom-sub-grid text-center">
    <div class="bt-icon">
        <span class="fas fa-rocket"></span>
    </div>
```

```
                <h4 class="sub-tittle-w3layouts my-lg-4 my-3">Fast Shipping</h4>
                <p>Duis mollis, est non commodo luctus, nisi erat porttitor ligula, eget lacinia odio sem nec elit.</p>
                <p>
                    <a href="shop.html" class="btn btn-sm animated-button gibson-three mt-4">Shop Now</a>
                </p>
            </div>
<!-- /.col-lg-4 -->
<div class="col-lg-4 bottom-sub-grid text-center">
    <div class="bt-icon">
        <span class="far fa-sun"></span>
    </div>
```

```
                <h4 class="sub-tittle-w3layouts my-lg-4 my-3">UV Protection</h4>
```

```

        <p>Duis mollis, est non commodo luctus, nisi erat
porttitor ligula, eget lacinia odio sem nec elit.</p>
        <p>
            <a href="shop.html" class="btn btn-
sm animated-button gibson-three mt-4">Shop Now</a>
        </p>
    </div>
    <!-- /.col-lg-4 -->
</div>
</div>
<!-- //grids -->
<!--/meddle-->
<div class="row">
    <div class="col-md-12 middle-slider my-4">
        <div class="middle-text-info ">

```

```

        <h3 class="tittle-w3layouts two text-center my-
lg-4 mt-3">Spring Flash sale</h3>
        <div class="simply-countdown-custom" id="simply-
countdown-custom"></div>

```

```

    </div>
</div>
</div>
<!--//meddle-->

```

```

<!-- /testimonials -->
<div class="testimonials py-lg-4 py-3 mt-4">
    <div class="testimonials-inner py-lg-4 py-3">
        <h3 class="tittle-w3layouts text-center my-lg-4 my-
4">Tesimonials</h3>
        <div id="carouselExampleControls" class="carousel sli
de" data-ride="carousel">
            <div class="carousel-inner" role="listbox">
                <div class="carousel-item active">
                    <div class="testimonials_grid text-
center">
                        <h3>Gillian Swift
                        <span>Customer</span>
                        </h3>
                        <label>United Kingdom</label>
                        <p>I collected my new tortoiseshell g
lasses today in Meltham. Wonderful service, expert care & guidance from Chery
l & her team - Josie & Amy. Thank you</p>
                    </div>
                </div>
                <div class="carousel-item">

```

```

        <div class="testimonials_grid text-
center">
            <h3>Michelle Ross
                <span>Customer</span>
            </h3>
            <label>United States</label>
            <p>Well... I'd just like to say that
Goggles Opticians in our little town are amazing. I didn't realise how much I
was struggling with my eyesight and shonky gems until my visit to them this
afternoon. Awesome staff - thank you </p>
        </div>
    </div>
    <div class="carousel-item">
        <div class="testimonials_grid text-
center">
            <h3>Amy Gault
                <span>Customer</span>
            </h3>
            <label>France</label>
            <p>I've got new glasses! Thanks to th
e lovely Sheryl and Amy at Goggles. It's like someone's turned the lights on!
Lovely service, help choosing frames and getting the right deal, VERY covid
aware a thoroughly lovely experience well worth the long journey I make</p>
        </div>
    </div>
    <a class="carousel-control-
prev test" href="#carouselExampleControls" role="button" data-slide="prev">
        <span class="fas fa-long-arrow-alt-
left"></span>
        <span class="sr-only">Previous</span>
    </a>
    <a class="carousel-control-
next test" href="#carouselExampleControls" role="button" data-slide="next">
        <span class="fas fa-long-arrow-alt-
right" aria-hidden="true"></span>
        <span class="sr-only">Next</span>

```

```

        </a>
    </div>
</div>
</div>
</div>
<!-- //testimonials -->

```

```

    </div>
</div>
</section>

```

```
@endsection
```

```
@section('pageScripts')
```

```
<!-- Count-down -->
<script src="{{ asset('assets/js/simpleCountdown.js') }}"></script>
<link href="{{ asset('assets/css/simpleCountdown.css') }}" rel='stylesheet' type='text/css' />
<script>
    var d = new Date();
    simplyCountdown('simply-countdown-custom', {
        year: d.getFullYear(),
        month: d.getMonth() + 2,
        day: 25
    });
</script>
<!--// Count-down -->
```

```
@endsection
```

3.2.10 client.pages.author

```
@extends('client.layout')
```

```
@section('title') Goggles | Author @endsection
```

```
@section('keywords') goggles, author, author of goggles, contact optic store,  
sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Find more information about author of website. @endse  
ction
```

```
@section('banner')
```

```
@include('client.components.banner', ['bannerTitle' => "Author"])
```

```
@endsection
```

```
@section('content')
```

```
<section class="banner-bottom-wthreelayouts py-lg-5 py-3">  
  <div class="container">  
    <h3 class="tittle-w3layouts text-center my-lg-4 my-4">Author</h3>  
    <div class="row">  
  
      <div class="col-md-12 mx-auto text-center my-5">  
        <h2>Aleksandar Madić 2/18</h2>  
      </div>  
      <div class="col-md-6">  
          
      </div>  
      <div class="col-md-6">  
        <p> I am currently a student at the ICT College. I was bo  
rn in Bor, where I finished elementary and high school. In high school, I fir  
st encountered web design and a little bit of programming and I liked it. It  
made me choose this college. In my spare time, I like to play basketball, go  
to the theater, travel and explore new things.</p>  
      </div>
```

```
    </div>  
  </div>  
</section>
```

```
@endsection
```

```
@section('pageScripts')
```

```
<script src="{{ asset('assets/js/contact.js') }}"></script>  
@endsection
```

3.2.11 client.pages.cart

```
@extends('client.layout')
```

```
@section('title') Goggles | Shopping cart @endsection
```

```
@section('keywords') goggles, goggles cart, optic store, sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Find products you added to cart on this page. @endsection
```

```
@section('banner')
```

```
@include('client.components.banner', ['bannerTitle' => "Cart"])
```

```
@endsection
```

```
@section('content')
```

```
<section class="banner-bottom-wthreelayouts py-lg-5 py-3">
  <div class="container">
    <div class="inner-sec-shop px-lg-4 px-3">
      <h3 class="tittle-w3layouts my-lg-4 mt-3">Cart </h3>
```

```
<div class="alert alert-  
success" role="alert" id="orderSuccess">  
</div>
```



```

        </tr>
    </thead>
    <tbody>

        @php
            $total = 0;
        @endphp

        @foreach($products as $key => $product)

            @php
                $total += $product->
>quantity * $product->prices[count($product->prices) - 1]->price;

                // var_dump($product->price);

            @endphp

            <tr class="rem1" id="row{{ $product->id }}">

                <td class="invert">{{ $key + 1 }}</td>

                <td class="invert-image">
                    <a href="{{ route('products.show',
['product' => $product->id]) }}">
                        image) }}" alt="Product {{ $product->
name }}" class="img-responsive" />
                    </a>
                </td>

                <td>
                    <input type="number" class="form-
control quantity" data-productid="{{ $product->id }}" value="{{ $product->
quantity }}" />
                </td>

                <td class="invert">{{ $product->
name }} </td>

                <td class="invert">${<span id="pricePr
oduct{{ $product->id }}">{{ $product->prices[count($product->prices) - 1]-
>price }}</span></td>

                <td class="invert">
                    <div class="rem">
                        <div class="close-
icon removeProductFromCart" data-productid="{{ $product->id }}"> </div>
                    </div>

```

```

        </td>
    </tr>

    @endforeach

</tbody>
</table>

<div class="my-4">
    <p id="priceParent">Total: $<span id="totalPr
ice">{{ $total }}</span></p>

</div>

</div>

<div class="checkout-left row" id="order_form">

    <div class="offset-md-3 col-md-6 address_form">
        <h4>Add order details</h4>

        <form action="payment.html" method="post" cla
ss="creditly-card-form agileinfo_form">
            <section class="creditly-
wrapper wrapper">

                <div class="information-wrapper">
                    <div class="first-row form-
group">

                        <input type="hidden" id="user
_id" value="{{ session()->get('user')->id }}" />

                        <div class="controls">
                            <label class="control-
label">Full name: </label>

                            <input class="billing-
address-name form-
control" type="text" id="name" name="name" placeholder="Full name" value="{{
session()->get('user')->first_name . ' ' . session()->get('user')-
>last_name }}" />

                            <small id="nameError" cla
ss="form-text text-danger order-
error">We'll never share your email with anyone else.</small>

                        </div>

```



```

        </div>

        <div class="controls">
            <label class="control-
label">Address: </label>

            <input class="form-
control" type="text" placeholder="Address" id="address" />

            <small id="addressError"
class="form-text text-danger order-
error">We'll never share your email with anyone else.</small>

        </div>

        <div class="controls">
            <label class="control-
label">Card number:</label>

            <input class="form-
control" type="text" placeholder="Card number" id="card_number" />

            <small id="card_numberErr
or" class="form-text text-danger order-
error">We'll never share your email with anyone else.</small>

        </div>

        <div class="controls">
            <label class="control-
label">CVV:</label>

            <input class="form-
control" type="text" placeholder="CVV" id="cvv" />

            <small id="cvvError" clas
s="form-text text-danger order-
error">We'll never share your email with anyone else.</small>

        </div>

        </div>
        <button type="button" class="subm
it check_out" id="submitOrder">Submit</button>
    </div>
</section>
</form>
{{-- <div class="checkout-right-basket">
    <a href="payment.html">Make a Payment </a
>

    </div> --}}
</div>

```

```
<div class="clearfix"> </div>

</div>
```

```
    @else
        <h4 id="no-elements">Your cart is empty</h4>
    @endif

</div>
```

```
</div>
```

```
</div>
</section>
```

```
@endsection
```

```
@section('pageScripts')
```

```
<script src="{{ asset('assets/js/orders.js') }}"></script>
```

```
<!--quantity-->
<script>
    $('.value-plus').on('click', function () {
        var divUpd = $(this).parent().find('.value'),
            newVal = parseInt(divUpd.text(), 10) + 1;
        divUpd.text(newVal);
    });
```

```
    $('.value-minus').on('click', function () {
        var divUpd = $(this).parent().find('.value'),
            newVal = parseInt(divUpd.text(), 10) - 1;
        if (newVal >= 1) divUpd.text(newVal);
    });
</script>
<!--quantity-->
<!--close-->
<script>
    $(document).ready(function (c) {
        $('.close1').on('click', function (c) {
            $('.rem1').fadeOut('slow', function (c) {
                $('.rem1').remove();
            });
        });
    });
});
```

```
</script>
<script>
    $(document).ready(function (c) {
        $('.close2').on('click', function (c) {
            $('.rem2').fadeOut('slow', function (c) {
                $('.rem2').remove();
            });
        });
    });
</script>
<script>
    $(document).ready(function (c) {
        $('.close3').on('click', function (c) {
            $('.rem3').fadeOut('slow', function (c) {
                $('.rem3').remove();
            });
        });
    });
</script>
<!--//close-->
```

@endsection

3.2.12 client.pages.contact

```
@extends('client.layout')
```

```
@section('title') Goggles | Contact @endsection
```

```
@section('keywords') goggles, contact, contact goggles, contact optic store,  
sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Have any questions? Feel free to send message or call.  
@endsection
```

```
@section('banner')
```

```
@include('client.components.banner', ['bannerTitle' => "Contact"])
```

```
@endsection
```

```
@section('content')
```

```
<section class="banner-bottom-wthreelayouts py-lg-5 py-3">  
  <div class="container">  
    <h3 class="tittle-w3layouts text-center my-lg-4 my-4">Contact</h3>  
    <div class="inner_sec">  
      <p class="sub text-center mb-lg-5 mb-3">We love to discuss your idea</p>  
      <div class="address row">
```

```
        <div class="col-lg-4 address-grid">  
          <div class="row address-info">  
            <div class="col-md-3 address-left text-center">  
              <i class="far fa-map"></i>  
            </div>  
            <div class="col-md-9 address-right text-left">  
              <h6>Address</h6>  
              <p> California, USA
```

```
            </p>  
          </div>  
        </div>
```

```
      </div>  
    <div class="col-lg-4 address-grid">  
      <div class="row address-info">  
        <div class="col-md-3 address-left text-center">  
          <i class="far fa-envelope"></i>
```

```

        </div>
        <div class="col-md-9 address-right text-left">
            <h6>Email</h6>
            <p>Email :
                <a href="mailto:example@email.com"> info@goggles.com</a>

```

```

        </p>
    </div>

```

```

    </div>
</div>
<div class="col-lg-4 address-grid">
    <div class="row address-info">
        <div class="col-md-3 address-left text-center">
            <i class="fas fa-mobile-alt"></i>
        </div>
        <div class="col-md-9 address-right text-left">
            <h6>Phone</h6>
            <p>+1 234 567 8901</p>

```

```

    </div>

```

```

    </div>
</div>
</div>
<div class="contact_grid_right">
    <form action="#" method="post">
        @csrf

```

```

    <div class="alert" role="alert" id="emailStatus">
</div>

```

```

    <div class="row contact_left_grid">
        <div class="col-md-6 con-left">

```

```

            <div class="form-group">
                <label class="my-2">Name</label>
                <input class="form-control" type="text" name="Name" id="name" placeholder="">

```

```

                <small id="nameError" class="form-text text-danger contact-error"></small>
            </div>
            <div class="form-group">
                <label>Email</label>

```



```
<input class="form-control" type="email" name="Email" id="email" placeholder="">
```

```

        <small id="emailError" class="form-
text text-danger contact-error"></small>
    </div>
    <div class="form-group">
        <label class="my-2">Subject</label>
        <input class="form-
control" type="text" name="Subject" id="subject" placeholder="">

```

```

        <small id="subjectError" class="form-
text text-danger contact-error"></small>
      </div>
    </div>
    <div class="col-md-6 con-right">
      <div class="form-group">
        <label for="message">Message</label>
        <textarea id="message" placeholder=""></t
extarea>

```

```

        <small id="messageError" class="form-
text text-danger contact-error"></small>
      </div>
      <input class="form-
control" type="submit" value="Submit" id="submitContact" />
    </div>
  </div>
</form>
</div>
</div>
</div>
</section>

```

```
<div class="contact-map">
```

```
<iframe src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d10
0949.24429313939!2d-
122.44206553967531!3d37.75102885910819!2m3!1f0!2f0!3f0!3m2!1i1024!2i768!4f13.
1!3m3!1m2!1s0x80859a6d00690021%3A0x4a501367f076adff!2sSan+Francisco%2C+CA%2C+
USA!5e0!3m2!1sen!2sin!4v1472190196783"
class="map" style="border:0" allowfullscreen="">></iframe>
</div>
```

```
@endsection
```

```
@section('pageScripts')
<script src="{{ asset('assets/js/contact.js') }}"></script>
```

@endsection

3.2.13 client.pages.home

```
@extends('client.layout')
```

```
@section('title') Goggles | Home @endsection
```

```
@section('keywords') goggles, optic store, sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Shop for high-quality glasses and sunglasses at Goggles.com, Starting at just $60. See our huge selection of prescription eyewear in our online store now. @endsection
```

```
@section('banner')
```

```
    <!-- banner -->
    <div class="banner">
        <div id="carouselExampleIndicators" class="carousel slide" data-ride="carousel">
            <ol class="carousel-indicators">
                <li data-target="#carouselExampleIndicators" data-slide-to="0" class="active"></li>
                <li data-target="#carouselExampleIndicators" data-slide-to="1"></li>
                <li data-target="#carouselExampleIndicators" data-slide-to="2"></li>
                <li data-target="#carouselExampleIndicators" data-slide-to="3"></li>
            </ol>
            <div class="carousel-inner" role="listbox">
```

```
                @foreach($sliderImages as $slider)
                    <div class="carousel-item @if($loop-index == 0) active @endif" style="background-image: url('{{ asset('assets/images/' . $slider->image) }})">
                        <div class="carousel-caption text-center">
                            <h3>{{ $slider->heading }}
                                <span>{{ $slider->subheading }}</span>
                            </h3>
                            <a href="{{ route('home.products') }}" class="btn btn-sm animated-button gibbon-three mt-4">Shop Now</a>
                        </div>
                    </div>
                @endforeach
```

```
</div>
```

```

        <a class="carousel-control-
prev" href="#carouselExampleIndicators" role="button" data-slide="prev">
        <span class="carousel-control-prev-icon" aria-
hidden="true"></span>
        <span class="sr-only">Previous</span>
    </a>
    <a class="carousel-control-
next" href="#carouselExampleIndicators" role="button" data-slide="next">
        <span class="carousel-control-next-icon" aria-
hidden="true"></span>
        <span class="sr-only">Next</span>
    </a>
</div>
<!--//banner -->
</div>
</div>

```

```
@endsection
```

```
@section('content')
```

```

<!--//banner-sec-->
<section class="banner-bottom-wthreelayouts py-lg-5 py-3">
    <div class="container-fluid">
        <div class="inner-sec-shop px-lg-4 px-3">
            <h3 class="tittle-w3layouts my-lg-4 my-
4">New Arrivals for you </h3>
            <div class="row">

```

```

                @foreach($products as $product)
                    @include('client.components.product')
                @endforeach

```

```
</div>
```

```

<!--//meddle-->
<div class="row">
    <div class="col-md-12 middle-slider my-4">
        <div class="middle-text-info ">

```

```

                <h3 class="tittle-w3layouts two text-center my-
lg-4 mt-3">Spring Flash sale</h3>
                <div class="simply-countdown-custom" id="simply-
countdown-custom"></div>

```

```

        </div>
    </div>

```

```
</div>
<!--//meddle-->
```

```
<!-- /testimonials -->
<div class="testimonials py-lg-4 py-3 mt-4">
  <div class="testimonials-inner py-lg-4 py-3">
    <h3 class="tittle-w3layouts text-center my-lg-4 my-4">Tesimonials</h3>
    <div id="carouselExampleControls" class="carousel slide" data-ride="carousel">
      <div class="carousel-inner" role="listbox">
        <div class="carousel-item active">
          <div class="testimonials_grid text-center">
            <h3>Gillian Swift
              <span>Customer</span>
            </h3>
            <label>United Kingdom</label>
            <p>I collected my new tortoiseshell glasses today in Meltham. Wonderful service, expert care & guidance from Cheryl & her team - Josie & Amy. Thank you</p>
          </div>
        </div>
        <div class="carousel-item">
          <div class="testimonials_grid text-center">
            <h3>Michelle Ross
              <span>Customer</span>
            </h3>
            <label>United States</label>
            <p>Well... I'd just like to say that Goggles Opticians in our little town are amazing. I didn't realise how much I was struggling with my eyesight and shonky gemms until my visit to them this afternoon. Awesome staff - thank you </p>
          </div>
        </div>
        <div class="carousel-item">
          <div class="testimonials_grid text-center">
            <h3>Amy Gault
              <span>Customer</span>
            </h3>
            <label>France</label>
            <p>I've got new glasses! Thanks to the lovely Sheryl and Amy at Goggles. It's like someone's turned the lights on! Lovely service, help choosing frames and getting the right deal, VERY covid aware a thoroughly lovely experience well worth the long journey I make</p>
          </div>

```

```

        </div>
        <a class="carousel-control-
prev test" href="#carouselExampleControls" role="button" data-slide="prev">
        <span class="fas fa-long-arrow-alt-
left"></span>

        <span class="sr-only">Previous</span>
        </a>
        <a class="carousel-control-
next test" href="#carouselExampleControls" role="button" data-slide="next">
        <span class="fas fa-long-arrow-alt-
right" aria-hidden="true"></span>

        <span class="sr-only">Next</span>

```

```

        </a>
        </div>
    </div>
</div>
<!-- //testimonials -->
<div class="bottom-sub-grid-content py-lg-5 py-3">
    <div class="row">
        <div class="col-lg-4 bottom-sub-grid text-center">
            <div class="bt-icon">

```

```

        <span class="far fa-hand-paper"></span>
    </div>

```

```

        <h4 class="sub-tittle-w3layouts my-lg-4 my-
3">Satisfaction Guaranteed</h4>
        <p>With our Total Satisfaction Guarantee, you can
        be certain you have a quality product at a great price, while enjoying the b
        enefits of a free lifetime service for your glasses.</p>
        <p>
            <a href="{ route('home.products') }" class=
"btn btn-sm animated-button gibson-three mt-4">Shop Now</a>
        </p>
    </div>
    <!-- /.col-lg-4 -->
    <div class="col-lg-4 bottom-sub-grid text-center">
        <div class="bt-icon">
            <span class="fas fa-rocket"></span>
        </div>

```

```

        <h4 class="sub-tittle-w3layouts my-lg-4 my-
3">Fast Shipping</h4>
        <p>Once you've selected your frames, get ready to
        wear your perfect pair of glasses, because they are 2-
        4 days ahead your home.</p>

```

```

        <p>
          <a href="{ route('home.products') }}" class=
"btn btn-sm animated-button gibbon-three mt-4">Shop Now</a>
        </p>
      </div>
      <!-- /.col-lg-4 -->
      <div class="col-lg-4 bottom-sub-grid text-center">
        <div class="bt-icon">
          <span class="far fa-sun"></span>
        </div>

```

```

      <h4 class="sub-tittle-w3layouts my-lg-4 my-
3">UV Protection</h4>
      <p> The effect of UV light on our eyes and the da
nger of damage from UV radiation grows the more time we spend in the sun thro
ughout our lives.</p>
      <p>
        <a href="{ route('home.products') }}" class=
"btn btn-sm animated-button gibbon-three mt-4">Shop Now</a>
      </p>
    </div>
    <!-- /.col-lg-4 -->
  </div>
</div>
<!-- //grids -->

</div>
</div>
</section>

```

```
@endsection
```

```
@section("pageScripts")
```

```

<!-- Modal -->
<div class="modal fade" id="myModal" tabindex="-1" role="dialog" aria-
hidden="true">
  <div class="modal-dialog" role="document">
    <div class="modal-content">
      <div class="modal-header">

```

```

      <button type="button" class="close" data-
dismiss="modal" aria-label="Close">
        <span aria-hidden="true">&times;</span>
      </button>
    </div>
    <div class="modal-body text-center p-5 mx-auto mw-100">
      <h6>Join our newsletter and get</h6>

```

```

        <h3>50% Off for your first Pair of Eye wear</h3>
        <div class="login newsletter">
            <form action="#" method="post">
                <div class="form-group">
                    <label class="mb-2">Email address</label>
                    <input type="email" class="form-
control" id="exampleInputEmail2" aria-
describedby="emailHelp" placeholder="" required="">
                </div>
                <button type="submit" class="btn btn-
primary submit mb-4">Get 50% Off</button>
            </form>
            <p class="text-center">
                <a href="#">No thanks I want to pay full Price</a
>
            </p>
        </div>
    </div>

```

```

    </div>
</div>
</div>
<script>
    $(document).ready(function () {
        // $("#myModal").modal();
    });
</script>
<!-- // modal -->

```

```

<!-- Count-down -->
<script src="{{ asset('assets/js/simplyCountdown.js') }}"></script>
<link href="{{ asset('assets/css/simplyCountdown.css') }}" rel="stylesheet" type="text/css" />
<script>
    var d = new Date();
    simplyCountdown('simply-countdown-custom', {
        year: d.getFullYear(),
        month: d.getMonth() + 2,
        day: 25
    });
</script>
<!--// Count-down -->

```

```

<script src="{{ asset('assets/js/owl.carousel.js') }}"></script>
<script>
    $(document).ready(function () {
        $('.owl-carousel').owlCarousel({
            loop: true,

```



```
margin: 10,  
responsiveClass: true,  
responsive: {  
  0: {  
    items: 1,  
    nav: true  
  },  
  600: {  
    items: 2,  
    nav: false  
  },  
  900: {  
    items: 3,  
    nav: false  
  },  
  1000: {  
    items: 4,  
    nav: true,  
    loop: false,  
    margin: 20  
  }  
}  
})  
</script>
```

```
<!-- //end-smooth-scrolling -->
```

```
@endsection
```

3.2.14 client.pages.login

```
@extends('client.layout')

@section('title') Goggles | Log in @endsection

@section('keywords') goggles, log in goggles, log in optic store, sunglasses,
eyeglasses, goggles eyeglasses @endsection
@section('description') Login to use our full fuctionalities. @endsection

@section('banner')

    @include('client.components.banner', ['bannerTitle' => "Login"])

@endsection

@section('content')

    <section class="banner-bottom-wthreelayouts py-lg-5 py-3">
        <div class="container">
            <h3 class="tittle-w3layouts text-center my-lg-4 my-4">Log in</h3>

            <div class="inner_sec">

                <div class="contact_grid_right">

                    @if(session('loginFail'))

                        <div class="alert alert-danger" role="alert">
                            {{ session('loginFail') }}
                        </div>

                    @endif

                    <form action="{{ route('login') }}" method="post">

                        @csrf

                        <div class="row contact_left_grid">
                            <div class="col-md-6 con-left mx-auto">

                                {{-- {{ dd($fromCart) }} --}}

                                @isset($fromCart)
```

```

                <input type="hidden" name="fromCart" value="true" />
            @endisset

```

```

        <div class="form-group">
            <label>Email</label>
            <input class="form-control" type="email" name="email" placeholder="" value="{{ old('email') }}" />
            @error('email') border border-danger @enderror
        </div>

```

```

            @error('email')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
    </div>

```

```

        <div class="form-group">
            <label class="my-2" for="password">Password</label>
            <input class="form-control" type="password" name="password" id="password" placeholder="" />
            @error('password') border border-danger @enderror
        </div>

```

```

            @error('password')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
    </div>

```

```

    </div>

```

```

        <div class="form-group mt-3">
            <a href="{{ route('password.get') }}">Forgot your password?</a>
        </div>

```

```

        <div class="form-group mt-3">
            <input class="form-control" type="submit" value="Submit" />
        </div>

```

```

    </div>

```

```

        </div>
    </form>

```

```

        </div>
    </div>
</div>
</section>

```

```
@endsection
```

3.2.15 client.pages.passwordNew

```
@extends('client.layout')
```

```
@section('title') Goggles | Password Reset @endsection
```

```
@section('keywords') goggles, reset password, password recovery goggles, log  
in optic store, sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Login to use our full fuctionalities. @endsection
```

```
@section('banner')
```

```
@include('client.components.banner', ['bannerTitle' => "Password Reset"])
```

```
@endsection
```

```
@section('content')
```

```

    <section class="banner-bottom-wthreelayouts py-lg-5 py-3">
        <div class="container">
            <h3 class="tittle-w3layouts text-center my-lg-4 my-4">Password Reset</h3>

```

```
        <div class="inner_sec">
```

```
            <div class="contact_grid_right">
```

```

                <div class="alert" role="alert" id="passwordResponse">
            </div>

```

```

                <form action="{{ route('password.update') }}" method="post">

```

```
@csrf
```

```
<div class="row contact_left_grid">
    <div class="col-md-6 con-left mx-auto">
```

```
        @php
            $token = request()->get('validator');
        @endphp
```

```
        <input type="hidden" id="validatorToken" name=
="validatorToken" value="{{ $token }}" />
```

```
        <div class="form-group">
            <label class="my-
2" for="password">Enter new Password</label>
            <input class="form-
control @error('password') border border-
danger @enderror" type="password" name="password" id="password" placeholder="
" />
```

```
            <small id="passwordError" class="form-
text text-danger"></small>
```

```
        </div>
```

```
        <div class="form-group">
            <label class="my-
2" for="password_confirmation">Re-type new password</label>
            <input class="form-
control" type="password" name="password_confirmation" id="password_confirmati
on" placeholder="" />
        </div>
```

```
        <div class="form-group mt-3">
            <input class="form-
control" type="submit" value="Submit" id="submitNewPassword" />
        </div>
```

```
    </div>
```

```
    </div>
</form>
```

```

</div>
</div>
</div>
</section>
```

```
@endsection
```

```
@section('pageScripts')  
  <script src="{{ asset('assets/js/password.js') }}"></script>  
@endsection
```

3.2.17 client.pages.passwordReset

```
@extends('client.layout')
```

```
@section('title') Goggles | Password Recovery @endsection
```

```
@section('keywords') goggles, password reset, recovery goggles, optic store,  
sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Reset password for your account @endsection
```

```
@section('banner')
```

```
    @include('client.components.banner', ['bannerTitle' => "Password Recovery  
    "])
```

```
@endsection
```

```
@section('content')
```

```
    <section class="banner-bottom-wthreelayouts py-lg-5 py-3">  
        <div class="container">  
            <h3 class="tittle-w3layouts text-center my-lg-4 my-  
4">Password Recovery</h3>
```

```
            <div class="inner_sec">
```

```
                <div class="contact_grid_right">
```

```
                    <div class="alert" role="alert" id="emailResponse">  
                        </div>
```

```
                    <form action="{{ route('password.post') }}" method="post">  
>
```

```
                        @csrf
```

```
                            <div class="row contact_left_grid">  
                                <div class="col-md-6 con-left mx-auto">
```

```
                                    <div class="form-group">  
                                        <label>An e-  
mail will be send to you with instructions on how to reset password</label>  
                                        <input class="form-  
control @error('email') border border-  
danger @enderror" type="email" name="email" id="email" placeholder="Email..."  
value="{{ old('email') }}" />
```

```
        @error('email')
        <div class="text-danger">
            {{ $message }}
        </div>
    @enderror
</div>
```

```
        <small id="emailError" class="form-text text-
danger passwordResetError">blake@gmail.com</small>

        <div class="form-group mt-3">
            <input class="form-
control" name="btnReset" type="submit" id="btnReset" value="Submit" />
        </div>
```

```
        </div>

        </div>
    </form>
```

```
        </div>
    </div>
</div>
</section>
```

```
@endsection
```

```
@section('pageScripts')
    <script src="{{ asset('assets/js/password.js') }}"></script>
@endsection
```


3.2.18 client.pages.products

```
@extends('client.layout')
```

```
@section('title') Goggles | Shop @endsection
```

```
@section('keywords') goggles, optic store, sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Shop for high-quality glasses and sunglasses at Goggles.com, Starting at just $60. See our huge selection of prescription eyewear in our online store now. @endsection
```

```
@section('banner')
```

```
@include('client.components.banner', ['bannerTitle' => "Shop"])
```

```
@endsection
```

```
@section('content')
```

```
<!--/shop-->
<section class="banner-bottom-wthreelayouts py-lg-5 py-3">
  <div class="container-fluid">
    <div class="inner-sec-shop px-lg-4 px-3">
      <h3 class="tittle-w3layouts my-lg-4 mt-3">New Arrivals for you </h3>
```

```
      <div class="alert alert-success" role="alert" id="addedToCartSuccess">
```

```
</div>
```

```
      <div class="row">
        <!-- product Left -->
        <div class="side-bar col-lg-3">
          {{-- <form action="#" method="post"> --}}
          <div class="search-hotel">
            <h3 class="agileits-sear-head">Search Here..</h3>
            <form action="" method="post">
```

```
              <input class="form-control" type="search" name="keyword" id="keyword" placeholder="Search here..." required="" />
              <button type="button" class="btn1">
                <i class="fas fa-search"></i>
```

```

        </button>
        <div class="clearfix"> </div>
    </div>
    <!-- price range -->
    {{-- <div class="range">
        <h3 class="agileits-sear-
head">Price range</h3>
        <ul class="dropdown-menu6">
            <li>

```

```

                <div id="slider-range"></div>
                <input type="text" id="amount" style=
"border: 0; color: #ffffff; font-weight: normal;" />
            </li>
        </ul>
    </div> --}}
    <!-- //price range -->

```

```

    <!-- sort -->
    <div class="sort">
        <h3 class="agileits-sear-
head">Choose sort:</h3>
        <select class="form-control" id="sort">
            <option value="n_asc">Name: A-Z</option>
            <option value="n_desc">Name: Z-A</option>
            <option value="p_asc">Price: Low to High<
/option>
            <option value="p_desc">Price: High to Low
</option>
        </select>
    </div>
    <!-- //sort -->

```

```

    <!-- preference -->
    <div class="left-side">
        <h3 class="agileits-sear-head">Gender</h3>
        <ul>
            <li>
                <input type="radio" name="gender" cla
ss="checked" value="10">
                <span class="span">All</span>
            </li>
            <li>
                <input type="radio" name="gender" cla
ss="checked" value="1">
                <span class="span">Male</span>
            </li>
            <li>

```

```

                                <input type="radio" name="gender" cla
ss="checked" value="0">
                                <span class="span">Female</span>
                                </li>

```

```

                                </ul>
                                </div>
                                <!-- // preference -->
                                <!-- discounts -->
                                <div class="left-side">
                                <h3 class="agileits-sear-
head">Categories</h3>
                                {{-- <form action="" method="get"> --}}
                                <ul>
                                @foreach($categories as $category)
                                <li>
                                <input type="checkbox" class=
"checked" name="category_ids[]" value="{{ $category->id }}" />
                                <span class="span">{{ $catego
ry->category_name }}</span>
                                </li>

```

```

                                @endforeach
                                {{-- <li>
                                <input type="checkbox" class="che
cked" />
                                <span class="span">5% or More</sp
an>
                                </li> --}}
                                </ul>

```

```

                                </div>
                                <!-- //discounts -->
                                <!-- brands -->
                                <div class="customer-rev left-side">
                                <h3 class="agileits-sear-head">Brands</h3>
                                {{-- <form action="" method="get"> --}}
                                <ul>
                                @foreach($brands as $brand)
                                <li>
                                <input type="checkbox" class=
"checked" name="brand_ids[]" value="{{ $brand->id }}" />
                                <span class="span">{{ $brand-
>brand_name }}</span>
                                </li>

```

```

                                @endforeach

```

```

                                {{-- <li>
                                <input type="checkbox" class="che
cked" />
                                <span class="span">5% or More</sp
an>
                                </li> --}}

                                </ul>

```

```

                                </div>
                                <!-- //brands -->

```

```

                                <input type="button" id="submitFilters" name="sub
mitFilters" class="btn btn-orange mt-4" value="Apply" />

```

```

                                </form>

                                </div>
                                <!-- //product left -->
                                <!--//product right-->
                                <div class="left-ads-display col-lg-9">
                                    <div class="wrapper_top_shop">

                                        <div class="row" id="products">

```

```

                                        @foreach($products as $product)
                                        @include('client.components.product')
                                        @endforeach

```

```

                                </div>

                                {{ $products-
>links('vendor.pagination.bootstrap-4') }}

```

```

                                </div>
                                </div>
                                <!--//product right-->
                                </div>
                                <!--//slide-->
                                <div class="slider-img mid-sec mt-lg-5 mt-2">
                                    <!--//banner-sec-->
                                    <h3 class="tittle-w3layouts text-left my-lg-4 my-
3">Featured Products</h3>
                                    <div class="mid-slider">
                                        <div class="owl-carousel owl-theme row">

```

```

                                @foreach($featured_products as $f_product)

```

```

                                @include('client.components.featuredProdu
ct')

                                @endforeach

                                </div>
                            </div>
                        </div>
                    <!--//slider-->
                </div>
            </div>
        </section>

```

```
@endsection
```

```
@section('pageScripts')
```

```

<!-- price range (top products) -->
<script src="{{ asset('assets/js/jquery-ui.js') }}"></script>
<script>
    //<![CDATA[
        $(window).load(function () {
            $("#slider-range").slider({
                range: true,
                min: 0,
                max: 9000,
                values: [50, 6000],
                slide: function (event, ui) {
                    $("#amount").val("$" + ui.values[0] + " -
$" + ui.values[1]);
                }
            });
            $("#amount").val("$" + $("#slider-
range").slider("values", 0) + " - $" + $("#slider-
range").slider("values", 1));

```

```

        }); //]]>
    </script>
<!-- //price range (top products) -->

```

```

<script src="{{ asset('assets/js/owl.carousel.js') }}"></script>
<script>
    $(document).ready(function () {
        $('.owl-carousel').owlCarousel({
            loop: true,
            margin: 10,
            responsiveClass: true,
            responsive: {
                0: {

```

```
        items: 1,  
        nav: true  
    },  
    600: {  
        items: 2,  
        nav: false  
    },  
    900: {  
        items: 3,  
        nav: false  
    },  
    1000: {  
        items: 4,  
        nav: true,  
        loop: false,  
        margin: 20  
    }  
}  
}))  
</script>
```

@endsection

3.2.19 client.pages.register

```
@extends('client.layout')
```

```
@section('title') Goggles | Register @endsection
```

```
@section('keywords') goggles, register, register goggles, optic store, sunglasses, eyeglasses, goggles eyeglasses @endsection
```

```
@section('description') Register your account to get the exclusive offers @endsection
```

```
@section('banner')
```

```
    @include('client.components.banner', ['bannerTitle' => "Register"])
```

```
@endsection
```

```
@section('content')
```

```
    <section class="banner-bottom-wthreelayouts py-lg-5 py-3">
        <div class="container">
            <h3 class="tittle-w3layouts text-center my-lg-4 my-4">Register your account</h3>
            <div class="inner_sec">

                <div class="contact_grid_right">
```

```
                    @if(session('registerStatus'))
```

```
                        <div class="alert alert-danger" role="alert">
                            {{ session('registerStatus') }}
                        </div>
```

```
                    @endif
```

```
                    @if(session('registerSuccess'))
```

```
                        <div class="alert alert-success" role="alert">
                            {{ session('registerSuccess') }}
                        </div>
```

```
                    @endif
```

```
                <form action="{{ route('register') }}" method="post">
```

```
@csrf
```

```
        <div class="row contact_left_grid">
            <div class="col-md-6 con-left">
                <div class="form-group">
                    <label class="my-
2" for="first_name">First Name</label>
                    <input class="form-
control @error('first_name') border border-
danger @enderror" type="text" name="first_name" id="first_name" placeholder="
" value="{{ old('first_name') }}" />
```

```
                    @error('first_name')
                        <div class="text-danger">
                            {{ $message }}
                        </div>
                    @enderror
```

```
</div>
```

```
        <div class="form-group">
            <label class="my-
2" for="last_name">Last Name</label>
            <input class="form-
control @error('last_name') border border-
danger @enderror" type="text" name="last_name" id="last_name" placeholder=""
value="{{ old('last_name') }}" />
```

```
                    @error('last_name')
                        <div class="text-danger">
                            {{ $message }}
                        </div>
                    @enderror
```

```
</div>
```

```
        <div class="form-group">
            <label>Email</label>
            <input class="form-
control @error('email') border border-
danger @enderror" type="email" name="email" placeholder="" value="{{ old('ema
il') }}" />
```

```
                    @error('email')
                        <div class="text-danger">
                            {{ $message }}
```



```
        </div>
    @enderror
```

```
        </div>
    </div>
    <div class="col-md-6 con-right">
        <div class="form-group">
            <label class="my-
2" for="password">Password</label>
            <input class="form-
control @error('password') border border-
danger @enderror" type="password" name="password" id="password" placeholder="
" />
```

```
        @error('password')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
```

```
    </div>
```

```
        <div class="form-group">
            <label class="my-
2" for="password_confirmation">Re-type password</label>
            <input class="form-
control" type="password" name="password_confirmation" id="password_confirmati
on" placeholder="" />
        </div>
```

```
        <div class="form-group mt-3">
            <input class="form-
control" type="submit" value="Submit" />
        </div>
```

```
        </div>
    </div>
</form>
</div>
</div>
</div>
</section>
```

```
@endsection
```

3.2.20 client.pages.single

```
@extends('client.layout')
```

```
@section('title') Goggles | Single Product @endsection
```

```
@section('keywords') goggles, optic store, sunglasses, eyeglasses, goggles ey  
eglasses @endsection
```

```
@section('description') Find information for specific product on this page. @  
endsection
```

```
@section('banner')
```

```
    @include('client.components.banner', ['bannerTitle' => "Product " . $prod  
uct->name])
```

```
@endsection
```

```
@section('content')
```

```
    <section class="banner-bottom-wthreelayouts py-lg-5 py-3">  
        <div class="container">  
            <div class="inner-sec-shop pt-lg-4 pt-3">  
                <div class="row">  
                    <div class="alert alert-  
success" role="alert" id="addedToCartSuccess"> </div>
```

```
                <div class="col-lg-4 single-right-left ">  
                    <div class="grid images_3_of_2">  
                        <div class="flexslider1">  
  
                            <ul class="slides">  
                                <li data-  
thumb="{{ asset("assets/images/$product->name/$product->image") }}">  
                                    <div class="thumb-  
image"> name/$product-  
>image") }}" data-imagezoom="true" class="img-fluid" alt=" "> </div>  
                                </li>
```

```
@php
```

```
$img2 = $product->images[0];
```

```
$img3 = $product->images[1];
```

```
@endphp
```

```

                <li data-
thumb="{{ asset("assets/images/$product->name/$img2->image") }}">
                    <div class="thumb-
image"> name/$img2-
>image") }}" data-imagezoom="true" class="img-fluid" alt=" "> </div>
                </li>
                <li data-
thumb="{{ asset("assets/images/$product->name/$img3->image") }}">
                    <div class="thumb-
image"> name/$img3-
>image") }}" data-imagezoom="true" class="img-fluid" alt=" "> </div>
                </li>
            </ul>
            <div class="clearfix"></div>
        </div>
    </div>
    <div class="col-lg-8 single-right-
left simpleCart_shelfItem">
        <h3>{{ $product->name }} / {{ $product-
>brand->brand_name }} / {{ $product->category->category_name }}</h3>
        <p><span class="item_price">${{ $product->prices[count($product->prices) - 1]->price}}</span>
            {{-- <del>$1,199</del> --}}
        </p>

        <div class="description">
            <p>{{ $product->description }} </p>
        </div>

```

```

        @if(session()->has('user'))
            <div class="occasion-cart">
                <div class="googles single-
item singlepage">

                    <form action="#" method="post">

                        <button type="button" class="
googles-cart pgoogles-cart cartBtn" data-productid="{{ $product->id }}">
                            Add to cart
                        </button>

                    </form>

```

```

        </div>
    </div>

```

```

                                @else
                                <small>Log in to be able to add to cart!<
/small>

                                @endif

```

```

                                <ul class="footer-social text-left mt-lg-
4 mt-3">

                                <li>Share On : </li>
                                <li class="mx-2">
                                    <a href="https://www.facebook.com
/" target="_blank">

                                    <span class="fab fa-facebook-
f"></span>

                                    </a>
                                </li>
                                <li class="mx-2">
                                    <a href="https://www.twitter.com/
" target="_blank">

                                    <span class="fab fa-
twitter"></span>

                                    </a>
                                </li>

                                <li class="mx-2">
                                    <a href="https://www.linkedin.com
/" target="_blank">

                                    <span class="fab fa-linkedin-
in"></span>

                                    </a>
                                </li>
                                <li class="mx-2">
                                    <a href="#" target="_blank">
                                        <span class="fas fa-
rss"></span>

                                        </a>
                                </li>

                                </ul>

                                </div>
                                <div class="clearfix"> </div>

                                </div>
                                </div>
                                </div>
                                <div class="container-fluid">
                                    <!--/slide-->
                                    <div class="slider-img mid-sec mt-lg-5 mt-2 px-lg-5 px-3">

```

```

        <!--//banner-sec-->
        <h3 class="tittle-w3layouts text-left my-lg-4 my-
3">Featured Products</h3>
        <div class="mid-slider">
            <div class="owl-carousel owl-theme row">

                @foreach($featured_products as $f_product)
                    @include('client.components.featuredProduct')
                @endforeach

```

```

            </div>
        </div>
    </div>
    <!--//slider-->
</div>
</section>

```

```
@endsection
```

```
@section('pageScripts')
```

```

<!-- single -->
<script src="{{ asset('assets/js/imagezoom.js') }}"></script>
<!-- single -->

```

```

<!-- script for responsive tabs -->
<script src="{{ asset('assets/js/easy-responsive-tabs.js') }}"></script>
<script>
    $(document).ready(function () {
        $('#horizontalTab').easyResponsiveTabs({
            type: 'default', //Types: default, vertical, accordion

            width: 'auto', //auto or any width like 600px
            fit: true, // 100% fit in a container
            closed: 'accordion', // Start closed if in accordion view
            activate: function (event) { // Callback function if tab is s
switched

                var $tab = $(this);
                var $info = $('#tabInfo');
                var $name = $('span', $info);
                $name.text($tab.text());
                $info.show();
            }
        });
        $('#verticalTab').easyResponsiveTabs({
            type: 'vertical',
            width: 'auto',

```

```

        fit: true
    });
});
</script>
<!-- FlexSlider -->
<script src="{{ asset('assets/js/jquery.flexslider.js') }}"></script>
<script>
    // Can also be used with $(document).ready()
    $(window).load(function () {
        $('.flexslider1').flexslider({
            animation: "slide",
            controlNav: "thumbnails"
        });
    });
</script>
<!-- //FlexSlider-->

```

```

<script src="{{ asset('assets/js/owl.carousel.js') }}"></script>
<script>
    $(document).ready(function () {
        $('.owl-carousel').owlCarousel({
            loop: true,
            margin: 10,
            responsiveClass: true,
            responsive: {
                0: {
                    items: 1,
                    nav: true
                },
                600: {
                    items: 2,
                    nav: false
                },
                900: {
                    items: 3,
                    nav: false
                },
                1000: {
                    items: 4,
                    nav: true,
                    loop: false,
                    margin: 20
                }
            }
        })
    })
</script>

```

@endsection

3.2.21 admin.layout

```
<!DOCTYPE html>
<html lang="en">

<head>
```

```
    @include('admin.fixed.head')

</head>
```

```
<body id="page-top">

    <!-- Page Wrapper -->
    <div id="wrapper">
```

```
        @include('admin.fixed.sidebar')
```

```
        @yield('content')
```

```
        @include('admin.fixed.footer')
```

```
    </div>
    <!-- End of Page Wrapper -->
```

```
    @include('admin.fixed.scripts')
```

```
    @yield('pageScripts')
```

```
</body>
```

```
</html>
```


3.2.22 admin.actions.index

```
@extends('admin.layout')
```

```
@section('title') User Actions @endsection
```

```
@section('content')
```

```
<!-- Main Content -->
```

```
<div id="content">
```

```
<!-- Begin Page Content -->
```

```
<div class="container-fluid my-5">
```

```
<!-- Page Heading -->
```

```
<div class="d-sm-flex align-items-center justify-content-between mb-4">
```

```
<h1 class="h3 mb-0 text-gray-800">Users actions</h1>
```

```
</div>
```

```
@if(session()->has('success'))
```

```
<div class="container mt-4">
```

```
<div class="alert alert-success" role="alert">
```

```
{{ session('success') }}
```

```
</div>
```

```
</div>
```

```
@endif
```

```
@if(session()->has('errorMessage'))
```

```
<div class="container mt-4">
```

```
<div class="alert alert-danger" role="alert">
```

```
{{ session('errorMessage') }}
```

```
</div>
```

```
</div>
```

```
@endif
```

```
<div class="my-5">
```

```
<form class="form-inline">
```

```
<label for="created_at" class="mr-2">Select date</label>
```

```
<input type="date" class="form-control mr-4" id="created_at" name="created_at">
```

```
<label for="select_all" class="mr-2">Select All</label>
```

```
<input type="checkbox" class="form-control mr-4" name="select_all" id="select_all" value="10" />
```

```

        <button type="button" class="btn btn-
primary" id="submitDate">Submit</button>
    </form>
</div>

```

```
<div class="row">
```

```

    <div class="col-md-12">

        <table class="table table-hover table-bordered">
            <thead>
                <tr>
                    <th>#</th>
                    <th>Action</th>
                    <th>User</th>
                    <th>Date</th>
                </tr>
            </thead>
            <tbody id="table_actions">
                @foreach($actions as $key => $action)
                    <tr>
                        <td>{{ $key + 1 }}</td>
                        <td>{{ $action->action }}</td>
                        <td>{{ $action->user-
>first_name . ' ' . $action->user->last_name }}</td>
                        <td>{{ $action->created_at }}</td>
                    </tr>
                @endforeach
            </tbody>

```

```

        <tfoot>
            <tr>
                <th>#</th>
                <th>Action</th>
                <th>User</th>
                <th>Date</th>
            </tr>
        </tfoot>
    </table>

```

```

    </div>
</div>

```

```

</div>
<!-- /.container-fluid -->

```

```
@endsection
```

```
@section('pageScripts')
```

```
<script src="{{ asset('assets/admin/js/actions.js') }}"></script>
```

```
@endsection
```

3.2.23 admin.brands.create

```
@extends('admin.layout')
```

```
@section('title') Add new Brand @endsection
```

```
@section('content')
```

```
    <!-- Main Content -->
    <div id="content">
```

```
        <!-- Begin Page Content -->
        <div class="container-fluid my-5">
```

```
            <!-- Page Heading -->
            <div class="d-sm-flex align-items-center justify-content-
between mb-4">
                <h1 class="h3 mb-0 text-gray-800">Add new Brand</h1>
            </div>
```

```
                <div class="row">
                    <div class="col-md-6">
```

```
                        @if(session()->has('success'))
                            <div class="container mt-4">
                                <div class="alert alert-success" role="alert">
                                    {{ session('success')}}
                                </div>
                            </div>
                        @endif
```

```
                        @if(session()->has('errorMessage'))
                            <div class="container mt-4">
                                <div class="alert alert-danger" role="alert">
                                    {{ session('errorMessage')}}
                                </div>
                            </div>
                        @endif
```

```
                            @include('admin.brands.form', ['action' => 'brands.store'])
                        )
```

```
                    </div>
```

```
                </div>
```

```
</div>
<!-- /.container-fluid -->
```

```
@endsection
```

```
@section('pageScripts')
```

```
<script src="{{ asset('assets/admin/js/brands.js') }}"></script>
```

```
@endsection
```

3.2.24 admin.brands.edit

```
@extends('admin.layout')
```

```
@section('title') Edit the Brand @endsection
```

```
@section('content')
```

```
<!-- Main Content -->
<div id="content">
```

```
<!-- Begin Page Content -->
<div class="container-fluid my-5">
```

```
<!-- Page Heading -->
<div class="d-sm-flex align-items-center justify-content-
between mb-4">
    <h1 class="h3 mb-0 text-gray-800">Edit {{ $brand-
>name }} brand</h1>
</div>
```

```
<div class="row">
    <div class="col-md-6">
```

```
        @if(session()->has('success'))
            <div class="container mt-4">
                <div class="alert alert-success" role="alert">
                    {{ session('success')}}
                </div>
            </div>
        @endif
```

```

        @if(session()->has('errorMessage'))
            <div class="container mt-4">
                <div class="alert alert-danger" role="alert">
                    {{ session('errorMessage')}}
                </div>
            </div>
        @endif

```

```

        @include('admin.brands.form', ['action' => 'brands.update
'])

```

```

    </div>

```

```

</div>

```

```

</div>
<!-- /.container-fluid -->

```

```

@endsection

```

```

@section('pageScripts')

```

```

    <script src="{{ asset('assets/admin/js/products.js') }}"></script>

```

```

@endsection

```

3.2.25 admin.brands.edit

```

@extends('admin.layout')

```

```

@section('title') Edit the Brand @endsection

```

```

@section('content')

```

```

    <!-- Main Content -->
    <div id="content">

```

```

        <!-- Begin Page Content -->
        <div class="container-fluid my-5">

```

```

            <!-- Page Heading -->

```

```
        <div class="d-sm-flex align-items-center justify-content-between mb-4">
            <h1 class="h3 mb-0 text-gray-800">Edit {{ $brand->name }} brand</h1>
        </div>
```

```
<div class="row">
    <div class="col-md-6">
```

```
        @if(session()->has('success'))
            <div class="container mt-4">
                <div class="alert alert-success" role="alert">
                    {{ session('success')}}
                </div>
            </div>
        @endif
```

```
        @if(session()->has('errorMessage'))
            <div class="container mt-4">
                <div class="alert alert-danger" role="alert">
                    {{ session('errorMessage')}}
                </div>
            </div>
        @endif
```

```
        @include('admin.brands.form', ['action' => 'brands.update'])
```

```
    </div>
```

```
</div>
```

```
</div>
<!-- /.container-fluid -->
```

```
@endsection
```

```
@section('pageScripts')
```

```
    <script src="{{ asset('assets/admin/js/products.js') }}"></script>
```

```
@endsection
```

3.2.26 admin.brands.form

```
<form action="@if($action == "brands.update") {{ route($action, $brand->id) }} @else {{ route($action) }} @endif" method="POST" enctype="multipart/form-data">
```

```
    @csrf
    @if($action == 'brands.update')
        @method("PUT")
    @endif
```

```
    <div class="form-group">
        <label for="brand_name">Name</label>
        <input class="form-control" id="brand_name" name="brand_name" value="{{ $brand->brand_name ?? old('brand_name') }}" />
        <p class="help-block">Example: Gucci</p>
```

```
        @error('name')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
    </div>
```

```
    <div class="form-group">
        <label for="gender">Active</label>
        <div class="radio">
            <input type="radio" name="brand_active" id="active_yes" value="1" @if(isset($brand) && $brand->brand_active == 1) checked @endif /> Yes
        </div>
```

```
        <div class="radio">
            <input type="radio" name="brand_active" value="0" @if(isset($brand) && $brand->brand_active == 0) checked @endif /> No
        </div>
```

```
        @error('active')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
```

```
</div>
```



```
<button type="submit" class="btn btn-primary">Submit</button>
```

```
</form>
```

3.2.27 admin.brands.index

```
@extends('admin.layout')
```

```
@section('title') Brands @endsection
```

```
@section('content')
```

```
<!-- Main Content -->
<div id="content">
```

```
<!-- Begin Page Content -->
<div class="container-fluid my-5">
```

```
<!-- Page Heading -->
<div class="d-sm-flex align-items-center justify-content-
between mb-4">
    <h1 class="h3 mb-0 text-gray-800">Brands</h1>
</div>
```

```
@if(session()->has('success'))
    <div class="container mt-4">
        <div class="alert alert-success" role="alert">
            {{ session('success')}}
        </div>
    </div>
@endif
```

```
@if(session()->has('errorMessage'))
    <div class="container mt-4">
        <div class="alert alert-danger" role="alert">
            {{ session('errorMessage')}}
        </div>
    </div>
@endif
```

```
<div class="my-4">
    <a href="{{ route('brands.create') }}" class="btn btn-
primary">Add new Brand</a>
```

```
</div>
```

```
<div class="row">
```

```
    <div class="col-md-12">
```

```
        <table class="table table-hover table-bordered">
```

```
            <thead>
```

```
                <tr>
```

```
                    <th>#</th>
```

```
                    <th>Name</th>
```

```
                    <th>Active</th>
```

```
                    <th>Edit</th>
```

```
                    <th>Delete</th>
```

```
                </tr>
```

```
            </thead>
```

```
            <tbody id="table_brands">
```

```
                @foreach($brands as $key => $brand)
```

```
                    <tr>
```

```
                        <td>{{ $key + 1 }}</td>
```

```
                        <td>{{ $brand->brand_name }}</td>
```

```
                        <td>
```

```
                            @if($brand->brand_active == 1)
```

```
                                Yes
```

```
                            @else
```

```
                                No
```

```
                            @endif
```

```
                        </td>
```

```
                        <td>
```

```
                            <a href="{{ route('brands.edit', ['brand' => $brand->id]) }}" ><i class="fas fa-fw fa-edit fa-lg"></i></a>
```

```
                        </td>
```

```
                        <td>
```

```
                            <form action="{{ route('brands.destroy', ['brand' => $brand->id]) }}" method="POST" class="delete-form">
```

```
                                @csrf
```

```
                                @method("DELETE")
```

```
                                <button type="submit" /><i class="fas fa-fw fa-trash fa-lg"></i></button>
```

```
                            </form>
```

```
                    </td>
```

```
                </tr>
```

```
        @endforeach
    </tbody>
```

```
        <tfoot>
            <tr>
                <th>#</th>
                <th>Name</th>
                <th>Active</th>
                <th>Edit</th>
                <th>Delete</th>
            </tr>
        </tfoot>
    </table>

</div>
</div>
```

```
</div>
<!-- /.container-fluid -->
```

```
@endsection
```

```
@section('pageScripts')
```

```
    <!-- Page level plugins -->
    <script src="{{ asset('assets/admin/vendor/datatables/jquery.dataTables.min.js') }}"></script>
    <script src="{{ asset('assets/admin/vendor/datatables/dataTables.bootstrap4.min.js') }}"></script>
```

```
    <!-- Page level custom scripts -->
    <script src="{{ asset('assets/admin/js/demo/datatables-demo.js') }}"></script>
```

```
    <script src="{{ asset('assets/admin/js/brands.js') }}"></script>
@endsection
```

3.2.28 admin.fixed.head

```
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-
scale=1, shrink-to-fit=no">
<meta name="description" content="">
<meta name="author" content="">

<meta name="csrf-token" content="{{ csrf_token() }}">
```

```
<title>@yield('title')</title>
```

```
<!-- Custom fonts for this template-->
<link href="{{ asset('assets/admin/vendor/fontawesome-
free/css/all.min.css') }}" rel="stylesheet" type="text/css">
<link
    href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300
i,400,400i,600,600i,700,700i,800,800i,900,900i"
    rel="stylesheet">
```

```
<!-- Custom styles for this template-->
<link href="{{ asset('assets/admin/css/sb-admin-
2.min.css') }}" rel="stylesheet" />
```

```
<link href="{{ asset('assets/admin/vendor/datatables/dataTables.bootstrap
4.min.css') }}" rel="stylesheet" />
```

3.2.29 admin.fixed.sidebar

```
<!-- Sidebar -->
<ul class="navbar-nav bg-gradient-primary sidebar sidebar-
dark accordion" id="accordionSidebar">

    <!-- Sidebar - Brand -->
    <a class="sidebar-brand d-flex align-items-center justify-content-
center" href="{{ route('admin.home') }}">
        {{-- <div class="sidebar-brand-icon rotate-n-15">
            <i class="fas fa-laugh-wink"></i>
        </div> --}}
        <div class="sidebar-brand-text mx-3">Goggles</div>
    </a>
```

```
<!-- Divider -->
```

```
<hr class="sidebar-divider my-0">
```

```
@php
    $navItems = [
        ['Dashboard', 'admin.home'],
        ['Products', 'products.index'],
        ['Brands', 'brands.index'],
        ['Orders', 'orders.index'],
        ['User actions', 'useractions.index']
    ];
@endphp
```

```
@foreach($navItems as $item)
    <li class="nav-item @if(request()-
>routeIs($item[1])) active @endif">
        <a class="nav-link" href="{{ route($item[1]) }}">
            <span>{{ $item[0] }}</span>
        </a>
    </li>
@endforeach
```

```
<!-- Divider -->
<hr class="sidebar-divider d-none d-md-block">
```

```
<!-- Sidebar Toggler (Sidebar) -->
<div class="text-center d-none d-md-inline">
    <button class="rounded-circle border-
0" id="sidebarToggle"></button>
</div>
```

```
</ul>
<!-- End of Sidebar -->
```

3.2.30 admin.fixed.footer

```
<!-- Footer -->
<footer class="sticky-footer bg-white">
  <div class="container my-auto">
    <div class="copyright text-center my-auto">
      <span>Copyright &copy; Your Website 2020</span>
    </div>
  </div>
</footer>
<!-- End of Footer -->

</div>
<!-- End of Content Wrapper -->
```

3.2.31 admin.fixed.scripts

```
<!-- Scroll to Top Button-->
<a class="scroll-to-top rounded" href="#page-top">
  <i class="fas fa-angle-up"></i>
</a>

<!-- Bootstrap core JavaScript-->
<script src="{{ asset('assets/admin/vendor/jquery/jquery.min.js') }}"></script>
<script src="{{ asset('assets/admin/vendor/bootstrap/js/bootstrap.bundle.min.js') }}"></script>

<!-- Core plugin JavaScript-->
<script src="{{ asset('assets/admin/vendor/jquery-easing/jquery.easing.min.js') }}"></script>
```

```
<!-- Custom scripts for all pages-->
<script src="{{ asset('assets/admin/js/sb-admin-2.min.js') }}"></script>
```

```
<script type="text/javascript">
  const baseUrl = "{{url('/')}}";
  const publicFolder = "{{asset('/')}}";
</script>
```

3.2.32 admin.orders.index

```
@extends('admin.layout')
```

```
@section('title') Orders @endsection
```

```
@section('content')
```

```
<!-- Main Content -->
```

```
<div id="content">
```

```
<!-- Begin Page Content -->
```

```
<div class="container-fluid my-5">
```

```
<!-- Page Heading -->
```

```
<div class="d-sm-flex align-items-center justify-content-between mb-4">
```

```
<h1 class="h3 mb-0 text-gray-800">Orders</h1>
```

```
</div>
```

```
@if(session()->has('success'))
```

```
<div class="container mt-4">
```

```
<div class="alert alert-success" role="alert">
```

```
{{ session('success') }}
```

```
</div>
```

```
</div>
```

```
@endif
```

```
@if(session()->has('errorMessage'))
```

```
<div class="container mt-4">
```

```
<div class="alert alert-danger" role="alert">
```

```
{{ session('errorMessage') }}
```

```
</div>
```

```
</div>
```

```
@endif
```

```
<div class="row">
```

```
<div class="col-md-12">
```

```
<table class="table table-hover table-bordered">
```

```
<thead>
```

```
<tr>
```

```
<th>#</th>
```

```
<th>User name</th>
```

```
<th>Address</th>
```

```

        <th>Paid</th>
        <th>Total price</th>
    </tr>
</thead>
<tbody id="table_actions">
    @foreach($orders as $key => $order)
        <tr>
            <td>{{ $key + 1 }}</td>
            <td>{{ $order->name }}</td>
            <td>{{ $order->address }}</td>
            <td>
                @if($order->is_paid == 1)
                    True
                @else
                    False
                @endif
            </td>
            <td>{{ $order->total_price }}</td>
        </tr>
    @endforeach
</tbody>

```

```

<tfoot>
    <tr>
        <th>#</th>
        <th>User name</th>
        <th>Address</th>
        <th>Paid</th>
        <th>Total price</th>
    </tr>
</tfoot>
</table>

```

```

</div>
</div>

```

```

</div>
<!-- /.container-fluid -->

```

```
@endsection
```

```
@section('pageScripts')
```

```
<script src="{{ asset('assets/admin/js/actions.js') }}"></script>
```

```
@endsection
```


3.2.33 admin.pages.home

```
@extends('admin.layout')

@section('title') Googles Admin - Dashboard @endsection

@section('content')

    <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">

        <!-- Main Content -->
        <div id="content">

            <!-- Topbar -->
            <nav class="navbar navbar-expand navbar-light bg-white topbar mb-4 static-top shadow">

                <!-- Sidebar Toggle (Topbar) -->
                <button id="sidebarToggleTop" class="btn btn-link d-md-none rounded-circle mr-3">
                    <i class="fa fa-bars"></i>
                </button>

                <!-- Topbar Navbar -->
                <ul class="navbar-nav ml-auto">

                    <!-- Nav Item - Search Dropdown (Visible Only XS) -->
                    <li class="nav-item dropdown no-arrow d-sm-none">
                        <a class="nav-link dropdown-toggle" href="#" id="searchDropdown" role="button"
                            data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
                            <i class="fas fa-search fa-fw"></i>
                        </a>
                        <!-- Dropdown - Messages -->
                        <div class="dropdown-menu dropdown-menu-right p-3 shadow animated--grow-in"
                            aria-labelledby="searchDropdown">
                            <form class="form-inline mr-auto w-100 navbar-search">
                                <div class="input-group">
                                    <input type="text" class="form-control bg-light border-0 small"
                                        placeholder="Search for..." aria-label="Search">
                                </div>
                            </form>
                        </div>
                    </li>
                </ul>
            </nav>

        </div>
    </div>

endsection
```

```

        aria-describedby="basic-addon2">
        <div class="input-group-append">
            <button class="btn btn-
primary" type="button">
                <i class="fas fa-search fa-
sm"></i>
            </button>
        </div>
    </div>
</form>
</div>
</li>

```

```

<div class="topbar-divider d-none d-sm-block"></div>

```

```

<!-- Nav Item - User Information -->
<li class="nav-item dropdown no-arrow">

    <a href="{ { route('logout') } }" class="nav-
link">Logout</a>
</li>

```

```

</ul>

```

```

</nav>
<!-- End of Topbar -->

```

```

<!-- Begin Page Content -->
<div class="container-fluid">

```

```

<!-- Page Heading -->
<div class="d-sm-flex align-items-center justify-content-
between mb-4">
    <h1 class="h3 mb-0 text-gray-
800">Welcome back, { { session()->get('user')->first_name . ' ' . session()-
>get('user')->last_name } }</h1>
    { {-- <a href="#" class="d-none d-sm-inline-block btn btn-
sm btn-primary shadow-sm"><i
        class="fas fa-download fa-sm text-white-
50"></i> Generate Report</a> --} }
</div>

```

```

<!-- Content Row -->
<div class="row">

```

```

<!-- Earnings (Monthly) Card Example -->
<div class="col-xl-4 col-md-6 mb-4">

```

```

        <div class="card border-left-primary shadow h-100 py-
2">
            <div class="card-body">
                <div class="row no-gutters align-items-
center">
                    <div class="col mr-2">
                        <div class="text-xs font-weight-
bold text-primary text-uppercase mb-1">
                            Earnings (Total)</div>
                            <div class="h5 mb-0 font-weight-
bold text-gray-800">${{ $total_sum }}</div>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

```

<!-- Earnings (Monthly) Card Example -->
<div class="col-xl-4 col-md-6 mb-4">
    <div class="card border-left-success shadow h-100 py-
2">
        <div class="card-body">
            <div class="row no-gutters align-items-
center">
                <div class="col mr-2">
                    <div class="text-xs font-weight-
bold text-success text-uppercase mb-1">
                        Number of orders</div>
                        <div class="h5 mb-0 font-weight-
bold text-gray-800">{{ $orders_num }}</div>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

```

<!-- Earnings (Monthly) Card Example -->
<div class="col-xl-4 col-md-6 mb-4">
    <div class="card border-left-info shadow h-100 py-2">
        <div class="card-body">
            <div class="row no-gutters align-items-
center">
                <div class="col mr-2">
                    <div class="text-xs font-weight-
bold text-info text-uppercase mb-1">Number of products

```

```
                <div class="h5 mb-0 font-weight-  
bold text-gray-800">{{ $products_num }}</div>  
            </div>  
        </div>  
    </div>  
    </div>  
    </div>  
</div>
```

```
</div>
```

```
<!-- Content Row -->
```

```
<div class="row">
```

```
</div>
```

```
</div>
```

```
<!-- /.container-fluid -->
```

```
</div>
```

```
<!-- End of Main Content -->
```

```
@endsection
```

```
@section('pageScripts')
```

```
<!-- Page Level plugins -->
```

```
<script src="{{ asset('assets/admin/vendor/chart.js/Chart.min.js') }}"></  
script>
```

```
<!-- Page Level custom scripts -->
```

```
<script src="{{ asset('assets/admin/js/demo/chart-area-  
demo.js') }}"></script>
```

```
<script src="{{ asset('assets/admin/js/demo/chart-pie-  
demo.js') }}"></script>
```

```
@endsection
```

3.2.34 admin.products.create

```
@extends('admin.layout')
```

```
@section('title') Create new Product @endsection
```

```
@section('content')
```

```
    <!-- Main Content -->
    <div id="content">
```

```
        <!-- Begin Page Content -->
        <div class="container-fluid my-5">
```

```
            <!-- Page Heading -->
            <div class="d-sm-flex align-items-center justify-content-
between mb-4">
                <h1 class="h3 mb-0 text-gray-800">Create new Product</h1>
            </div>
```

```
                <div class="row">
                    <div class="col-md-6">
```

```
                        @if(session()->has('success'))
                            <div class="container mt-4">
                                <div class="alert alert-success" role="alert">
                                    {{ session('success')}}
                                </div>
                            </div>
                        @endif
```

```
                        @if(session()->has('errorMessage'))
                            <div class="container mt-4">
                                <div class="alert alert-danger" role="alert">
                                    {{ session('errorMessage')}}
                                </div>
                            </div>
                        @endif
```

```
                            @include('admin.products.form', ['action' => 'products.st
ore'])
```

```
                    </div>
```

```
                </div>
```

```
</div>
<!-- /.container-fluid -->
```

```
@endsection
```

```
@section('pageScripts')
```

```
<script src="{{ asset('assets/admin/js/products.js') }}"></script>
```

```
@endsection
```

3.2.35 admin.products.edit

```
@extends('admin.layout')
```

```
@section('title') Edit the Product @endsection
```

```
@section('content')
```

```
<!-- Main Content -->
<div id="content">
```

```
<!-- Begin Page Content -->
<div class="container-fluid my-5">
```

```
<!-- Page Heading -->
<div class="d-sm-flex align-items-center justify-content-
between mb-4">
    <h1 class="h3 mb-0 text-gray-800">Edit {{ $product-
>name }} product</h1>
</div>
```

```
<div class="row">
    <div class="col-md-6">
```

```
        @if(session()->has('success'))
            <div class="container mt-4">
                <div class="alert alert-success" role="alert">
                    {{ session('success')}}
                </div>
            </div>
        @endif
```

```

        @if(session()->has('errorMessage'))
            <div class="container mt-4">
                <div class="alert alert-danger" role="alert">
                    {{ session('errorMessage')}}
                </div>
            </div>
        @endif

```

```

        @include('admin.products.form', ['action' => 'products.update'])

```

```

    </div>

```

```

</div>

```

```

</div>
<!-- /.container-fluid -->

```

```

@endsection

```

```

@section('pageScripts')

```

```

    <script src="{{ asset('assets/admin/js/products.js') }}"></script>

```

```

@endsection

```

3.2.36 admin.products.form

```

    <form action="@if($action == 'products.update') {{ route($action, $product-
>id) }}" @else {{ route($action) }}" @endif" method="POST" enctype="multipart/form-data">

```

```

        @csrf
        @if($action == 'products.update')
            @method("PUT")
        @endif

```

```

        <div class="form-group">
            <label for="name">Name</label>

```

```

        <input class="form-
control" id="name" name="name" value="{{ $product->name ?? old('name') }}" />
        <p class="help-block">Example block-level help text here.</p>

```

```

        @error('name')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
    </div>

```

```

    <div class="form-group">
        <label for="description">Description</label>
        <textarea class="form-
control" name="description" id="description" rows="5">{{ $product-
>description ?? old('description') }}</textarea>

```

```

        @error('description')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror

```

```

    </div>

```

```

    <div class="form-group">
        <label for="price">Price</label>
        {{-- <input class="form-
control" id="price" name="price" value="{{ old('price') ?? $product-
>prices[count($product->prices) - 1]->price }}" /> --}}
        <input class="form-
control" id="price" name="price" value="@if(isset($product)) {{ $product-
>prices[count($product->prices) - 1]-
>price }} @else {{ old('price') }} @endif" />

```

```

        @error('price')
            <div class="text-danger">
                {{ $message }}
            </div>
        @enderror
    </div>

```

```

    <div class="form-group">
        <label for="category">Category</label>
        <select class="form-control" name="category_id" id="category_id">
            @foreach($categories as $category)
                <option value="{{ $category-
>id }}" @if(isset($product) && $category->id == $product-

```



```
>category_id) selected="selected" @endif >{{ $category-
>category_name }}</option>
    @endforeach
</select>
```

```
    @error('category')
        <div class="text-danger">
            {{ $message }}
        </div>
    @enderror
</div>
```

```
    <div class="form-group">
        <label for="gender">Gender</label>
        <div class="radio">
            <input type="radio" name="gender_id" id="gender_male" val
ue="1" @if(isset($product) && $product-
>gender_id == 1) checked @endif /> Male
        </div>
```

```
    <div class="radio">
        <input type="radio" name="gender_id" id="gender_female" value
="0" @if(isset($product) && $product-
>gender_id == 0) checked @endif /> Female
    </div>
```

```
    @error('gender')
        <div class="text-danger">
            {{ $message }}
        </div>
    @enderror

</div>
```

```
    <div class="form-group">
        <label for="brand">Brand</label>
        <select class="form-control" name="brand_id" id="brand_id">
            @foreach($brands as $brand)
                <option value="{{ $brand-
>id }}" @if(isset($product) && $brand->id == $product-
>brand_id) selected="selected" @endif>{{ $brand->brand_name }}</option>
            @endforeach
        </select>
```

```
    @error('brand')
        <div class="text-danger">
            {{ $message }}
        </div>
```

```
@enderror
</div>
```

```
<div class="form-group">
    <label for="gender">Featured</label>
    <div class="radio">
        <input type="radio" name="featured" id="featured_true" value="1" @if(isset($product) && $product->featured == 1) checked @endif /> Yes
    </div>
```

```
<div class="radio">
    <input type="radio" name="featured" id="featured" value="0" @if(isset($product) && $product->featured == 0) checked @endif /> No
</div>
```

```
@error('featured')
    <div class="text-danger">
        {{ $message }}
    </div>
@enderror

</div>
<div class="form-group">
    <label for="gender">Active</label>
    <div class="radio">
        <input type="radio" name="is_active" id="active_yes" value="1" @if(isset($product) && $product->is_active == 1) checked @endif /> Yes
    </div>

    <div class="radio">
        <input type="radio" name="is_active" value="0" @if(isset($product) && $product->is_active == 0) checked @endif /> No
    </div>

    @error('active')
        <div class="text-danger">
            {{ $message }}
        </div>
    @enderror
</div>
```

```
@php
    // $images = ['Main image', 'Secondary image', 'Secondary image'];
```

```
$images = [
    ['Main image', 'image'],
    ['Secondary image', 'image2'],
```

```
        ['Secondary image', 'image3']  
    ];  
  
@endphp
```

```
        @foreach($images as $key => $image)  
            <div class="form-group">  
                <label for="image">{{ $image[0] }}</label>  
                <input type="file" name="{{ $image[1] }}" id="{{ $image[1] }}" />  
            </div>  
        @endforeach
```

```
        @error($image[1])  
            <div class="text-danger">  
                {{ $message }}  
            </div>  
        @enderror
```

```
    </div>  
@endforeach
```

```
{{!-- <div class="form-group">  
    <label for="image">Main image</label>  
    <input type="file" name="image" id="image" />  
--}}
```

```
@error('image')  
    <div class="text-danger">  
        {{ $message }}  
    </div>  
@enderror
```

```
</div>
```

```
<div class="form-group">  
    <label for="image">Secondary image</label>  
    <input type="file" name="image2" id="image2" />  
</div>
```

```
@error('image2')  
    <div class="text-danger">  
        {{ $message }}  
    </div>  
@enderror
```

```
<div class="form-group">  
    <label for="image">Secondary image</label>  
</div>
```

```
<input type="file" name="image3" id="image3" />
```

```
    @error('image3')
        <div class="text-danger">
            {{ $message }}
        </div>
    @enderror
</div> --}}
```

```
<button type="submit" class="btn btn-primary">Submit</button>
```

```
</form>
```

3.2.37 admin.products.index

```
@extends('admin.layout')
```

```
@section('title') Products @endsection
```

```
@section('content')
```

```
<!-- Main Content -->
```

```
<div id="content">
```

```
<!-- Begin Page Content -->
```

```
<div class="container-fluid my-5">
```

```
<!-- Page Heading -->
```

```
<div class="d-sm-flex align-items-center justify-content-between mb-4">
```

```
<h1 class="h3 mb-0 text-gray-800">Products</h1>
```

```
</div>
```

```
@if(session()->has('success'))
```

```
<div class="container mt-4">
```

```
<div class="alert alert-success" role="alert">
```

```
{{ session('success') }}
```

```
</div>
```

```
</div>
```

```
@endif
```

```
@if(session()->has('errorMessage'))
```

```
<div class="container mt-4">
```

```
<div class="alert alert-danger" role="alert">
```

```
{{ session('errorMessage') }}
```

```
</div>
```

```
</div>
```

```
@endif
```

```
<!-- DataTables Example -->
```

```
{{-- <div class="card shadow mb-4">
```

```
<div class="card-header py-3 d-flex justify-content-between">
```

```
<h6 class="m-0 font-weight-bold text-
```

```
primary">ALL Products</h6>
```

```
<a href="{{ route('products.create') }}" class="btn btn-
```

```
primary btn-sm">Add new Product</a>
```

```
</div>
```

```
<div class="card-body">
```

```

<div class="table-responsive">
    <table class="table table-
bordered" id="dataTable" width="100%" cellpadding="0">
        <thead>
            <tr>
                <th>Name</th>
                <th>Image</th>
                <th>Price</th>
                <th>Brand</th>
                <th>Gender</th>
                <th>Edit</th>
                <th>Delete</th>
            </tr>
        </thead>
        <tfoot>
            <tr>
                <th>Name</th>
                <th>Image</th>
                <th>Price</th>
                <th>Brand</th>
                <th>Gender</th>
                <th>Edit</th>
                <th>Delete</th>
            </tr>
        </tfoot>
        <tbody>
            @foreach($products as $product)

```

```

                <tr>
                    <td>{{ $product->name }}</td>
                    <td>
                        image) }}" alt="Product {{ $product-
>name }}" class="img-fluid admin-img" />
                    </td>
                    <td>${{ $product-
>prices[count($product->prices) - 1]->price}}</td>
                    <td>{{ $product->brand-
>brand_name}}</td>
                    <td>
                        @if($product->gender_id == 0)
                            Female
                        @else
                            Male
                        @endif
                    </td>
                </tr>
            @endforeach
        </tbody>
    </table>
</div>

```

```

                                <a href="{{ route('products.edit',
['product' => $product->id]) }}" ><i class="fas fa-fw fa-edit fa-
lg"></i></a>
                                </td>
                                <td>

```

```

                                <form action="{{ route('products.
destroy', ['product' => $product->id]) }}" method="POST" class="delete-form">
                                @csrf
                                @method("DELETE")

```

```

                                <button type="submit" /><i cl
ass="fas fa-fw fa-trash fa-lg"></i></button>

```

```

                                </form>

```

```

                                </td>
                                </tr>

```

```

                                @endforeach
                                </tbody>
                                </table>
                                </div>
                                </div>
                                </div> --}}

```

```

<div>
    <a href="{{ route('products.create') }}" class="btn btn-
primary">Add new Product</a>

```

```

</div>

```

```

<div class="my-5">
    <form class="form-inline">
        <label for="keyword" class="mr-2">Keyword</label>
        <input type="text" class="form-control mr-
4" id="keyword" placeholder="Product name">

```

```

        <label for="entities" class="mr-
2">Number of entities</label>
        <select name="entities" id="entities" class="form-
control mr-4">
            <option value="10">10</option>
            <option value="25">25</option>
            <option value="50">50</option>
            <option value="100">100</option>
        </select>

```

```

        <label for="sort" class="mr-2">Choose sort: </label>
        <select class="form-control mr-4" id="sort">
            <option value="n_asc">Name: A-Z</option>
            <option value="n_desc">Name: Z-A</option>
            <option value="p_asc">Price: Low to High</option>
            <option value="p_desc">Price: High to Low</option>
        </select>

        <button type="button" class="btn btn-
primary" id="submitFilters">Submit</button>
    </form>
</div>

```

```

{{-- <div id="filterForm py-4">

```

```

    <form action="#" method="get">

```

```

        <div class="form-group">
            <p>Show </p>
            <select class="form-control" id="numOfEntries">
                <option>10</option>
                <option>25</option>
                <option>50</option>
                <option>100</option>
            </select>
            <p> entries</p>
        </div>

```

```

    </form>

```

```

</div> --}}

```

```

<div class="row">

```

```

    <div class="col-md-12">

        <table class="table table-hover table-bordered">
            <thead>
                <tr>
                    <th>#</th>
                    <th>Name</th>
                    <th>Image</th>
                    <th>Price</th>
                    <th>Brand</th>
                    <th>Gender</th>

```



```

        <th>Edit</th>
        <th>Delete</th>
    </tr>
</thead>
<tbody id="table_products">
    @foreach($products as $key => $product)

```

```

        <tr>
            <td>{{ $key + 1 }}</td>
            <td>{{ $product->name }}</td>
            <td>
                name }}" class="img-fluid admin-img" />
            </td>
            <td>{{ $product->price }}</td>
            <td>{{ $product->brand_name }}</td>
            <td>
                @if($product->gender_id == 0)
                    Female
                @else
                    Male
                @endif
            </td>
            <td>
                <a href="{{ route('products.edit', ['product' => $product->id]) }}" ><i class="fas fa-fw fa-edit fa-lg"></i></a>
            </td>
            <td>

```

```

                <form action="{{ route('products.destroy', ['product' => $product->id]) }}" method="POST" class="delete-form">
                    @csrf
                    @method("DELETE")

```

```

                <button type="submit" /><i class="fas fa-fw fa-trash fa-lg"></i></button>

```

```

            </form>

```

```

        </td>
    </tr>

```

```

    @endforeach
</tbody>

```

```

<tfoot>
<tr>

```

```

                <td colspan="7">
                    {{ $products-
>links('vendor.pagination.bootstrap-4') }}
                </td>
            </tr>
            <tr>
                <th>#</th>
                <th>Name</th>
                <th>Image</th>
                <th>Price</th>
                <th>Brand</th>
                <th>Gender</th>
                <th>Edit</th>
                <th>Delete</th>
            </tr>
        </tfoot>
    </table>

</div>
</div>

```

```

</div>
<!-- /.container-fluid -->

```

```
@endsection
```

```
@section('pageScripts')
```

```

<!-- Page Level plugins -->
<script src="{{ asset('assets/admin/vendor/datatables/jquery.dataTables.m
in.js') }}"></script>
<script src="{{ asset('assets/admin/vendor/datatables/dataTables.bootstrap
p4.min.js') }}"></script>

```

```

<!-- Page level custom scripts -->
<script src="{{ asset('assets/admin/js/demo/datatables-
demo.js') }}"></script>

```

```

<script src="{{ asset('assets/admin/js/products.js') }}"></script>
@endsection

```

3.3 JS

3.3.1 script.js

```
$(document).ready(function() {
    $("#addedToCartSuccess").hide();
})

const token = $('meta[name="csrf-token"]').attr('content');

function ajax(url, method, data, success, error, dataType = "json", contentType = "application/x-www-form-urlencoded; charset=UTF-8", processData = true) {
    $.ajax({
        url: baseUrl + url,
        method: method,
        data: data,
        dataType: dataType,
        success: success,
        error: error,
        contentType: contentType,
        processData: processData
    })
}

$.ajaxSetup({
    headers: {
        'X-CSRF-TOKEN': token
    }
});

var login_data = new FormData();
var cart_data = new FormData();

function setDataForLogin() {
    login_data.set('email', $("#loginEmail").val());
    login_data.set('password', $("#loginPassword").val());
    login_data.set('_token', token);
}

function login() {
    setDataForLogin();

    ajax(
```

```
    '/login',
    'POST',
    login_data,
    function(data) {
        console.log(data);
```

```
        $(".loginResponse").html(data.message);
    },
    function(data) {
        if(data.responseJSON.errors)
            printErrors(data.responseJSON.errors, 'loginResponse');
    },
    'json',
    false,
    false
)
}
```

```
function printErrors(errors, selector) {
    let content = `<ul class='text-danger'>`;
    for(error of Object.keys(errors)) {
        content += `<li>+ errors[error][0] +`</li>`;
    }
    content += `</ul>`;
}
```

```
$(". " + selector).html(content);
}
```

```
function addProductToCart(productId) {
    cart_data.set('productId', productId);
}
```

```
ajax(
    '/cart',
    'POST',
    {
        productId,
        _token: token
    },
    function (data) {
        console.log(data);
        // alert(data.message);
    }
);
```

```
$("#addedToCartSuccess").fadeIn();
```

```
$("#addedToCartSuccess").html(data.message);
```

```
toggleAlert();
```

```
},  
function (xhr, status, error) {  
    console.log(xhr, status, error);
```

```
let statusCode = xhr.status;
```

```
    window.location.href = baseUrl + '/login';  
}  
);
```

```
}
```

```
function toggleAlert() {  
    setTimeout(function() {  
        $("#addedToCartSuccess").fadeOut();  
    }, 2500);  
}
```

```
function removeProductFromCart(productId) {  
    // cart_data.set('productId', productId);
```

```
    ajax(  
        '/cart',  
        'DELETE',  
        {  
            productId,  
            _token: token  
        },  
        function (data) {  
            console.log(data);
```

```
        $("#row" + productId).remove();
```

```
let totalPrice = 0;
```

```
    for (const el of data.itemsInCart) {  
        totalPrice += el.quantity * parseFloat($("#priceProduct" + el.  
productId).html());  
    }
```

```
    $("#totalPrice").html(totalPrice);
```

```
},  
function (xhr, status, error) {  
    console.log(xhr, status, error);
```

```
        let statusCode = xhr.status;

        if(statusCode == 400) {
            $("#cartDiv").html(`<h4 id="no-
elements">You emptied the cart</h4>`);
        }
    }
};
```

```
    }
};
```

```
}
```

```
function changeQuantity() {
    let value = parseInt($(this).val());
    let productId = $(this).data('productid');
```

```
    if(value < 1) {
        $(this).val(1);
    }
```

```
    return;
}
```

```
ajax(
    '/cart',
    'PUT',
    {
        quantity: value,
        productId,
        _token: token
    },
    function(data) {
        console.log(data);
    }
);
```

```
let totalPrice = 0;
```

```
for (const el of data.itemsInCart) {
    totalPrice += el.quantity * parseFloat($("#priceProduct" + el.
product_id).html());
}
```

```
$("#totalPrice").html(totalPrice);
```

```
},
function(xhr, status, error) {
    console.log(xhr, status, error);
},
```

```
)
```

```
}
```

```
// products  
var searchObj = {};
```

```
function changePage(e) {  
    e.preventDefault();
```

```
    let page = $(this).data('page');
```

```
    searchObj.keyword = $("#keyword").val();  
    searchObj.sort = $("#sort").val();  
    searchObj.gender = $("input[name='gender']:checked").val();  
    searchObj.categories = [];
```

```
    $.each($("input[name='category_ids[]']:checked"), function() {  
        searchObj.categories.push($(this).val());  
    });
```

```
    searchObj.brands = [];
```

```
    $.each($("input[name='brand_ids[]']:checked"), function() {  
        searchObj.brands.push($(this).val());  
    });
```

```
    getProducts(page, searchObj);
```

```
}
```

```
function searchProducts() {  
    searchObj.keyword = $("#keyword").val();  
    searchObj.sort = $("#sort").val();  
    searchObj.gender = $("input[name='gender']:checked").val();  
    searchObj.categories = [];
```

```
    $.each($("input[name='category_ids[]']:checked"), function() {  
        searchObj.categories.push($(this).val());  
    });
```

```
    searchObj.brands = [];
```

```
    $.each($("input[name='brand_ids[]']:checked"), function() {  
        searchObj.brands.push($(this).val());  
    });
```

```
getProducts(1, searchObj);
}
```

```
function getProducts(page, searchObj) {
  const caller = arguments.callee.caller.name;
```

```
searchObj.page = page;
```

```
ajax(  
  '/products/fetch',  
  'get',  
  searchObj,  
  function (response) {  
    console.log(response.data);  
  })  
);
```

```
if(caller == 'searchProducts') {
    changePagination(response.last_page, response.current_page);
}
```

```
if(caller == 'changePage') {
    changeActivePageLink(response.current_page);
}
```

```
printProducts(response.data);
```

```
},  
function (xhr, status, error) {  
    console.log(xhr, status, error);  
}
```

```
    },
    "json"
  );
}
```

```
function printProducts(data) {
  let out = "";
```

```
for (const product of data) {
  out += `
    <div class="col-md-3 product-men women_two my-3">
      <div class="product-googles-info googles">
        <div class="men-pro-item">
          <div class="men-thumb-item">
            
            <div class="men-cart-pro">
```



```

                <div class="inner-men-cart-pro">
                    <a href="products/${product.id}" class="link-product-add-cart">View</a>
                </div>
            </div>
        </div>
    </div>
    <div class="item-info-product">
        <div class="info-product-price">
            <div class="grid_meta">
                <div class="product_price">
                    <h4>
                        <a href="products/${product.id}">
                            ${product.name}</a>
                    </h4>
                    <div class="grid-price mt-2">
                        <span class="money ">${product.p
rice}</span>
                    </div>
                </div>
            </div>
            <ul class="stars">
                <li>
                    <a href="#">
                        <i class="fa fa-star" aria-
hidden="true"></i>
                    </a>
                </li>
                <li>
                    <a href="#">
                        <i class="fa fa-star" aria-
hidden="true"></i>
                    </a>
                </li>
                <li>
                    <a href="#">
                        <i class="fa fa-star" aria-
hidden="true"></i>
                    </a>
                </li>
                <li>
                    <a href="#">
                        <i class="fa fa-star-half-
o" aria-hidden="true"></i>

```



```
// events
$(document).on('click', '#btnLogin', login);
```

```
$(document).on('click', '.cartBtn', function() {
    let productId = parseInt($(this).data('productid'));

    addProductToCart(productId);
});
```

```
$(document).on('click', '.removeProductFromCart', function() {
    let productId = parseInt($(this).data('productid'));

```

```
    removeProductFromCart(productId);
});
```

```
$(document).on('blur', '.quantity', changeQuantity);
```

```
// products
$(document).on('click', '.page-link', changePage);
```

```
$(document).on('click', '#submitFilters', searchProducts);
```

3.3.2 orders.js

```
$(document).ready(function() {
    if($("#no-elements").length) {
        $("#order_form").hide();
    }

    $(".order-error").hide();

```

```
    $("#orderSuccess").hide();
})
```

```
var orderObj = {};
```

```
function submitOrder() {
    orderObj.user_id = parseInt($("#user_id").val());
    orderObj.name = $("#name").val();
    orderObj.phone = $("#phone").val();

```

```
orderObj.country = $("#country").val();
orderObj.city = $("#city").val();
orderObj.address = $("#address").val();
orderObj.card_number = $("#card_number").val();
orderObj.cvv = $("#cvv").val();
orderObj.total_price = $("#totalPrice").html();
```

```
$(".order-error").hide();
```

```
ajax(
  '/order',
  'POST',
  orderObj,
  function(data) {
    console.log(data);

    $("#cartDiv").fadeOut();
```

```
    $("#orderSuccess").fadeIn();
    $("#orderSuccess").html(data.message);
  },
  function(xhr) {
    console.log(xhr);
```

```
    printOrderErrors(xhr.responseJSON.errors);
  },
  'json'
);
```

```
}
```

```
function printOrderErrors(errors) {
  for(const [key, value] of Object.entries(errors)) {
    // console.log(key, value);
```

```
    $("#" + key + 'Error').html(value);
    $("#" + key + 'Error').fadeIn();
  }
```

```
}
```

```
// events
```

```
$(document).on('click', '#submitOrder', submitOrder);
```

3.3.3 contact.js

```
$(document).ready(function() {  
    $(".contact-error").hide();  
});
```

```
function sendEmail(e) {  
    e.preventDefault();
```

```
    $(".contact-error").hide();
```

```
    let name = $("#name").val();  
    let email = $("#email").val();  
    let subject = $("#subject").val();  
    let message = $("#message").val();
```

```
    ajax(  
        "/contact",  
        "POST",  
        {  
            name,  
            email,  
            subject,  
            message,  
            _token: token  
        },  
        function(data) {  
            console.log(data);
```

```
        $(".contact-error").hide();
```

```
        $("#emailStatus").addClass("alert-success");  
        $("#emailStatus").html(data.message);
```

```
    },  
    function(xhr) {  
        console.log(xhr);
```

```
        $("#emailStatus").html('');  
        $("#emailStatus").removeClass('alert-success');
```

```
        printContactErrors(xhr.responseJSON.errors);
```

```
    }  
    );
```

```
}
```

```
function printContactErrors(errors) {  
  for(const [key, value] of Object.entries(errors)) {  
    // console.log(key, value);
```

```
    $("#" + key + 'Error').html(value);  
    $("#" + key + 'Error').fadeIn();  
  }
```

```
}
```

```
// events  
$(document).on('click', '#submitContact', sendEmail);
```

3.3.4 password.js

```
$(document).ready(function() {  
    $("#emailError").hide();  
})
```

```
function sendResetEmail(e) {  
    e.preventDefault();
```

```
    let email = $("#email").val();
```

```
    $("#emailError").hide();
```

```
    ajax(  
        '/password/reset',  
        'POST',  
        {  
            email,  
            _token: token  
        },  
        function(data) {  
            console.log(data);
```

```
            $("#passwordResponse").removeClass('alert-  
danger').addClass('alert-info');  
            $("#emailResponse").html(data.message);  
        },  
        function(xhr) {  
            console.log(xhr);
```

```
            $("#emailError").html(xhr.responseJSON.errors.email);  
            $("#emailError").fadeIn();
```

```
        }  
    )
```

```
}
```

```
function submitNewPassword(e) {  
    e.preventDefault();
```

```
    let validatorToken = $("#validatorToken").val();
```

```
    let password = $("#password").val();  
    let password_confirmation = $("#password_confirmation").val();
```

```
$("#password").removeClass("border border-danger");
```

```
ajax(  
  '/password/new',  
  'POST',  
  {  
    password,  
    password_confirmation,  
    _token: token,  
    validatorToken  
  },  
  function(data) {  
    console.log(data);
```

```
    $("#passwordResponse").removeClass('alert-  
danger').addClass('alert-success');  
    $("#passwordResponse").html(data.message);  
  },  
  function(xhr) {  
    console.log(xhr);
```

```
    $("#password").addClass("border border-danger");  
    $("#passwordError").html(xhr.responseJSON.errors.password);  
  }  
)
```

```
}
```

```
// events  
$(document).on('click', '#btnReset', sendResetEmail);
```

```
$(document).on('click', '#submitNewPassword', submitNewPassword);
```


3.3.5 admin/actions.js

```
function submitDate() {
    let date = $("#created_at").val() ? $("#created_at").val() : "";
    let selectAll;

    if($("#select_all:checked").length == 0) {
        selectAll = false;
    } else {
        selectAll = true;
    }
}
```

```
ajax(
    '/admin/actions/filter',
    'get',
    {
        date,
        selectAll
    },
    function (response) {
        console.log(response);
```

```
        printActions(response);
```

```
    },
    function (xhr, status, error) {
        console.log(xhr, status, error);
```

```
    },
    "json"
);
```

```
}
```

```
function printActions(data) {
    let out = "";
```

```
    for(let i = 0; i < data.length; i++) {
        out += `
        <tr>
            <td>${i + 1}</td>
            <td>${ data[i].action }</td>
            <td>${ data[i].user.first_name + ' ' + data[i].user.last_name
        }</td>
            <td>${ data[i].created_at}</td>
        </tr>
```

```
`;
```

```
    console.log(data[i].created_at);  
  }
```

```
    $("#table_actions").html(out);  
  }
```

```
function emptyDate() {  
    $("#created_at").val("");
```

```
}
```

```
// events  
$(document).on('click', '#submitDate', submitDate);
```

```
$(document).on('click', '#select_all', emptyDate);
```

3.3.7 admin/brands.js

```
$(document).ready(function() {  
  
    if($("#input[name='active']:checked").length == 0) {  
        $("#active_yes").prop('checked', 'true');  
    }
```

```
});
```

3.3.8 admin/products.js

```
$(document).ready(function() {  
  
    if($("#input[name='gender_id']:checked").length == 0) {  
        $("#gender_male").prop('checked', 'true');  
    }
```

```
    if($("#input[name='featured']:checked").length == 0) {  
        $("#featured_true").prop('checked', 'true');  
    }
```

```
    if($("#input[name='is_active']:checked").length == 0) {  
        $("#active_yes").prop('checked', 'true');  
    }
```

```
});
```

```
var searchObj = {};
```

```
function changePage(e) {  
    e.preventDefault();
```

```
    let page = $(this).data('page');
```

```
    searchObj.keyword = $("#keyword").val();  
    searchObj.sort = $("#sort").val();  
    searchObj.number = $("#entities").val();
```

```
    getProducts(page, searchObj);
```

```
}
```

```
function searchProducts() {  
    searchObj.keyword = $("#keyword").val();  
    searchObj.sort = $("#sort").val();  
    searchObj.number = $("#entities").val();
```

```
    getProducts(1, searchObj);
```

```
}
```

```
function getProducts(page, searchObj) {  
    const caller = arguments.callee.caller.name;
```

```
    searchObj.page = page;
```

```
    ajax(  
        '/admin/products/fetch',  
        'get',  
        searchObj,  
        function (response) {  
            console.log(response.data);
```

```
        }  
        if(caller == 'searchProducts') {  
            changePagination(response.last_page, response.current_page);  
        }  
    });
```

```
    if(caller == 'changePage') {  
        changeActivePageLink(response.current_page);  
    }  
}
```

```
printProducts(response.data);
```

```
},  
function (xhr, status, error) {  
    console.log(xhr, status, error);
```

```
},  
"json"  
);  
}
```

```
function printProducts(data) {  
    let out = "";
```

```
    for (let i = 0; i < data.length; i++) {  
        out += `  
            <tr>  
                <td>${i + 1}</td>  
                <td>${data[i].name }</td>  
                <td>  
  
                      
                </td>  
                <td>${data[i].price}</td>  
                <td>${data[i].brand_name}</td>  
                <td>  
                    ${data[i].gender_id ? 'Male' : 'Female'}  
                </td>  
                <td>  
                    <a href="/admin/products/${data[i].id}/edit" ><i class="fas fa-  
a-fw fa-edit fa-lg"></i></a>  
                </td>  
                <td>  
                    <form action="/admin/products/${data[i].id}" method="POST" cl  
ass="delete-form">  
                        <input type="hidden" name="_token" value="${token}">  
                        <input type="hidden" name="_method" value="DELETE">
```

```
                        <button type="submit" /><i class="fas fa-fw fa-trash fa-  
lg"></i></button>
```

```
                    </form>
```

```
                </td>  
            </tr>  
        `;  
    }  
}
```

```
$("#table_products").html(out);
}
```

```
function changePagination(totalLinks, currentPage){
    let html = "";
    for(let i = 1; i <= totalLinks; i++){
        if(i != currentPage){
            html += `<li class="page-item"><a class="page-
link" id="link${i}" data-page="${i}" href="#">${i}</a></li>`;
        }else{
            html += `<li class="page-item active"><a class="page-
link" id = "link${i}" data-page="${i}" href="#">${i}</a></li>`;
        }
    }
    $(".pagination").html(html);
    $(".page-link").click(changePage);
}
```

```
function changeActivePageLink(currentPage){
    $('.page-item').removeClass('active');
    $('#link' + currentPage).parent().addClass('active');
}
```

```
// events
$(document).on('click', '.page-link', changePage);
$(document).on('click', '#submitFilters', searchProducts);
```

3.3.9 sb-admin-2.min.js

```
const token = $('meta[name="csrf-token"]').attr('content');

function ajax(url, method, data, success, error, dataType = "json", contentType = "application/x-www-form-urlencoded; charset=UTF-8", processData = true) {
    $.ajax({
        url: baseUrl + url,
        method: method,
        data: data,
        dataType: dataType,
        success: success,
        error: error,
        contentType: contentType,
        processData: processData
    })
}
```

```
$.ajaxSetup({
    headers: {
        'X-CSRF-TOKEN': token
    }
});
```

```
!function(s){"use strict";s("#sidebarToggle, #sidebarToggleTop").on("click",function(e){s("body").toggleClass("sidebar-toggled"),s(".sidebar").toggleClass("toggled"),s(".sidebar").hasClass("toggled")&&s(".sidebar .collapse").collapse("hide"))},s(window).resize(function(){s(window).width()<768&&s(".sidebar .collapse").collapse("hide"),s(window).width()<480&&!s(".sidebar").hasClass("toggled")&&(s("body").addClass("sidebar-toggled"),s(".sidebar").addClass("toggled"),s(".sidebar .collapse").collapse("hide")))),s("body.fixed-nav .sidebar").on("mousewheel DOMMouseScroll wheel",function(e){if(768<s(window).width()){var o=e.originalEvent,l=o.wheelDelta||-o.detail;this.scrollTop+=30*(l<0?1:-1),e.preventDefault()}}),s(document).on("scroll",function(){100<s(this).scrollTop()?s(".scroll-to-top").fadeIn():s(".scroll-to-top").fadeOut()}),s(document).on("click","a.scroll-to-top",function(e){var o=s(this);s("html, body").stop().animate({scrollTop:o.attr("href").offset().top},1e3,"easeInOutExpo"),e.preventDefault()}})(jQuery);
```